

40H VIT-visual indicator thumb turn

Installation Instructions

Tools needed:

Pencil



Ruler



Phillips screwdriver



Drill bit



1/8" [3.18]

Drill



Overview

NOTE: Check dimensions.


NOTE: See template if needed.

A VIT cover screws (x2)

B Mounting plate screws (x2)


C Thumb turn indicator (VIT)

D Mortise lockset

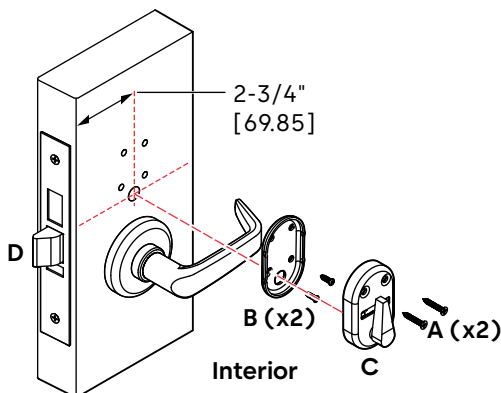


1 Uninstalling thumb turn, if previously installed

1.1 Uninstall thumb turn using a Phillips screwdriver.

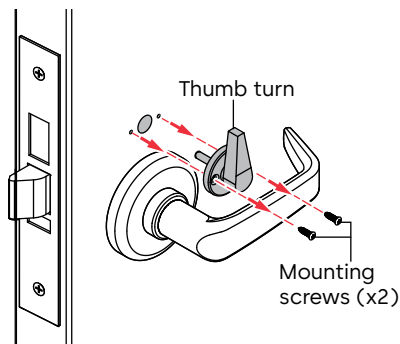

2 Uninstalling hardware, if previously installed


2.1 Using a Phillips screwdriver, uninstall components in the following order: levers, rose rings, roses, cassettes, and mortise lockset.

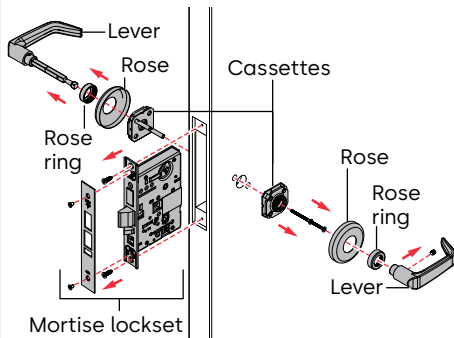

3 Drilling mounting holes


- 3.1 Mark and drill required VIT cover and VIT mounting plate holes. See 40H VIT-visual indicator thumb turn drilling instructions, A85306.

CAUTION! Only drill to pocket. Do not go through door.

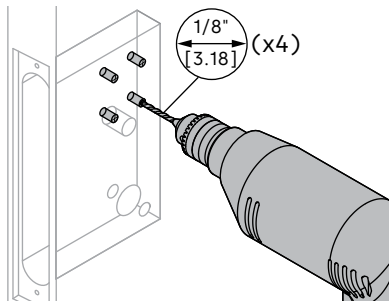

4 Reinstalling lockset hardware


- 4.1 Using a Phillips screwdriver, re-install mortise lockset, cassettes, roses, rose rings and levers.
- 4.2 Place VIT thumb turn mounting plate onto door; secure with two mounting plate screws using Phillips screwdriver.

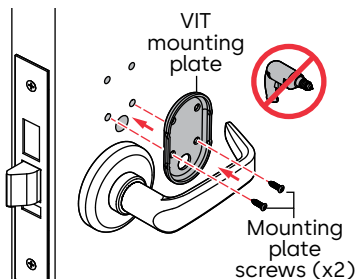

5 Installing VIT case cover

CAUTION! Mortise lock and VIT turn dial must be unlocked.


- 5.1 Place VIT case cover onto VIT mounting plate; secure with two screws using a Phillips screwdriver.

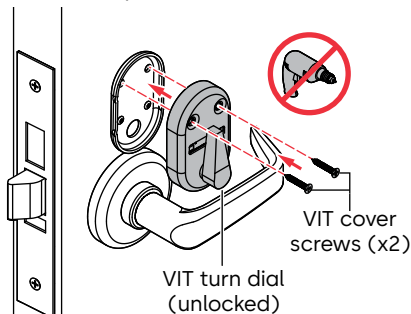

6 Testing VIT turn dial

CAUTION! Verify with key and thumb turn for proper operation.

- 6.1 Check key and thumb turn to confirm proper operation.

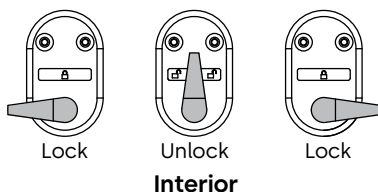

Document translations available.
Scan for product details and downloads.
Call 1-800-392-5209 or visit
<https://dhwsupport.dormakaba.com/hc/en-us>
for assistance and warranty information.

WARNING! This Manufacturer advises that no lock can provide complete security by itself. This lock may be defeated by forcible or technical means, or evaded by entry elsewhere on the property. No lock can substitute for caution, awareness of your environment, and common sense. Builder's hardware is available in multiple performance grades to suit the application. In order to enhance security and reduce risk, you should consult a qualified locksmith or other security professional.