Door Closer Models: HD8016 and HD8056
SDST Right Hand Parallel
Template/Drilling Instructions

Always consult BEST's website for the latest template at https://dhwsupport.dormakaba.com/hc/en-us or call 1-800-392-5209.

BEST
dormakaba Group

Material	Drill	Fastener
Steel	1/8" [3.1]	DPK
Steel/Aluminum	7/32" [5.5]	TPK
Wood/Steel Composite	3/8" [9.5]	Sex Nut
Steel/Aluminum (arm shoe)	#7 (.201), 13/64" [5.2]	1/4-20 UNC Machine Screw
Steel/Aluminum (closer body)	7/32" [5.5]	12 x 24 Machine Screw

SDST arm			
cushion	hold open	closer "A"	soffit PA "B"
90	85	4-5/8" 117.47mm	9-5/8" 244.47mm
95	90	3-3/4" 95.25mm	8-3/4" 222.25mm
115	110	1-3/8" 34.92mm	6-3/8" 161.92mm
90 hold open shown below			

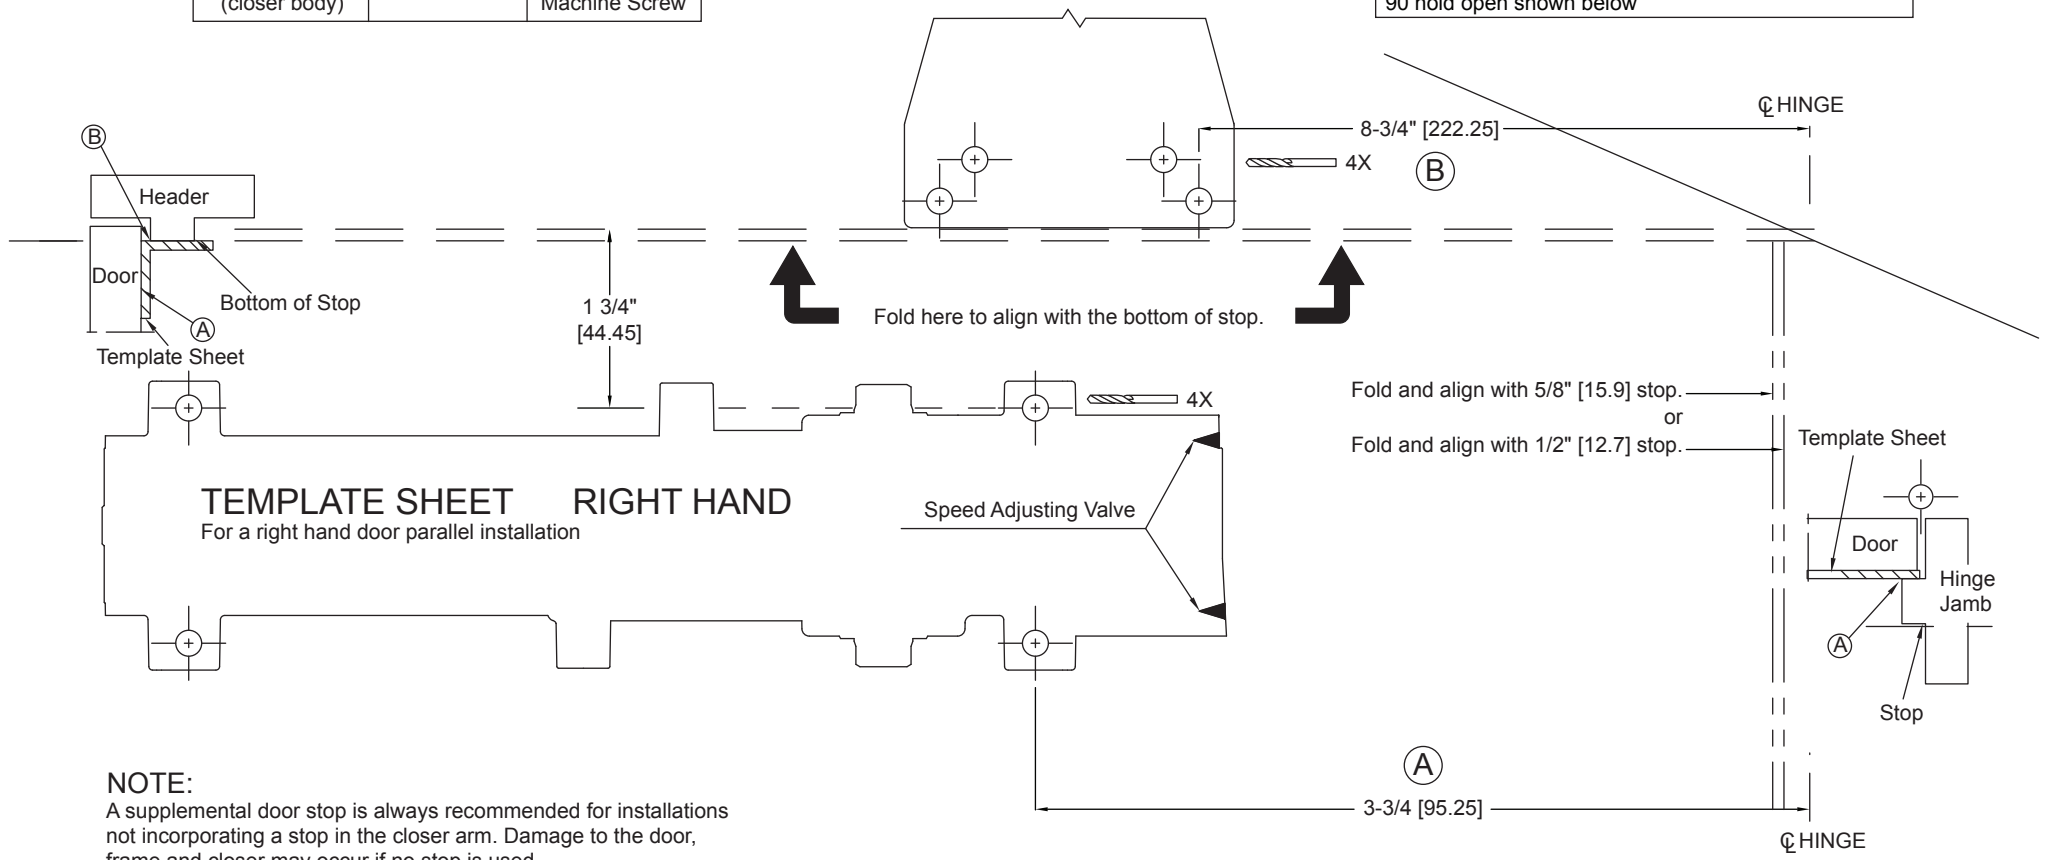

NOTE:
A supplemental door stop is always recommended for installations not incorporating a stop in the closer arm. Damage to the door, frame and closer may occur if no stop is used.

BEST is a trademark of dormakaba USA Inc. ©2020 All rights reserved.