

**Door Closer Models: EHD9016 Spring Door Saver Arm Installation  
With Thumb Turn Hold Open [S-DST] [Parallel Arm Mount]  
Template/Drilling Instructions**




For online instructions, assistance or warranty information:  
Call 1-800-392-5209 or visit <https://dhwsupport.dormakaba.com/hc/en-us>

**LEFT HAND SHOWN IN RED**

Material	Drill	Fastener
Steel	1/8" [3.1]	DPK
Steel/Aluminum	7/32" [5.5]	TPK
Wood/Steel Composite	3/8" [9.5]	Sex Nut
Steel/Aluminum (arm shoe)	#7 (.201), 13/64" [5.2]	1/4-20 unc Machine Screw
Steel/Aluminum (closer body)	#7 (.201), 13/64" [5.2]	1/4-20 unc Machine Screw

Soffit Plate Center Distance	Opening Angle
11-1/16" [281]	85°
10-5/16" [262]	90°
9-1/16" [230]	100°
8-1/16" [205]	110°

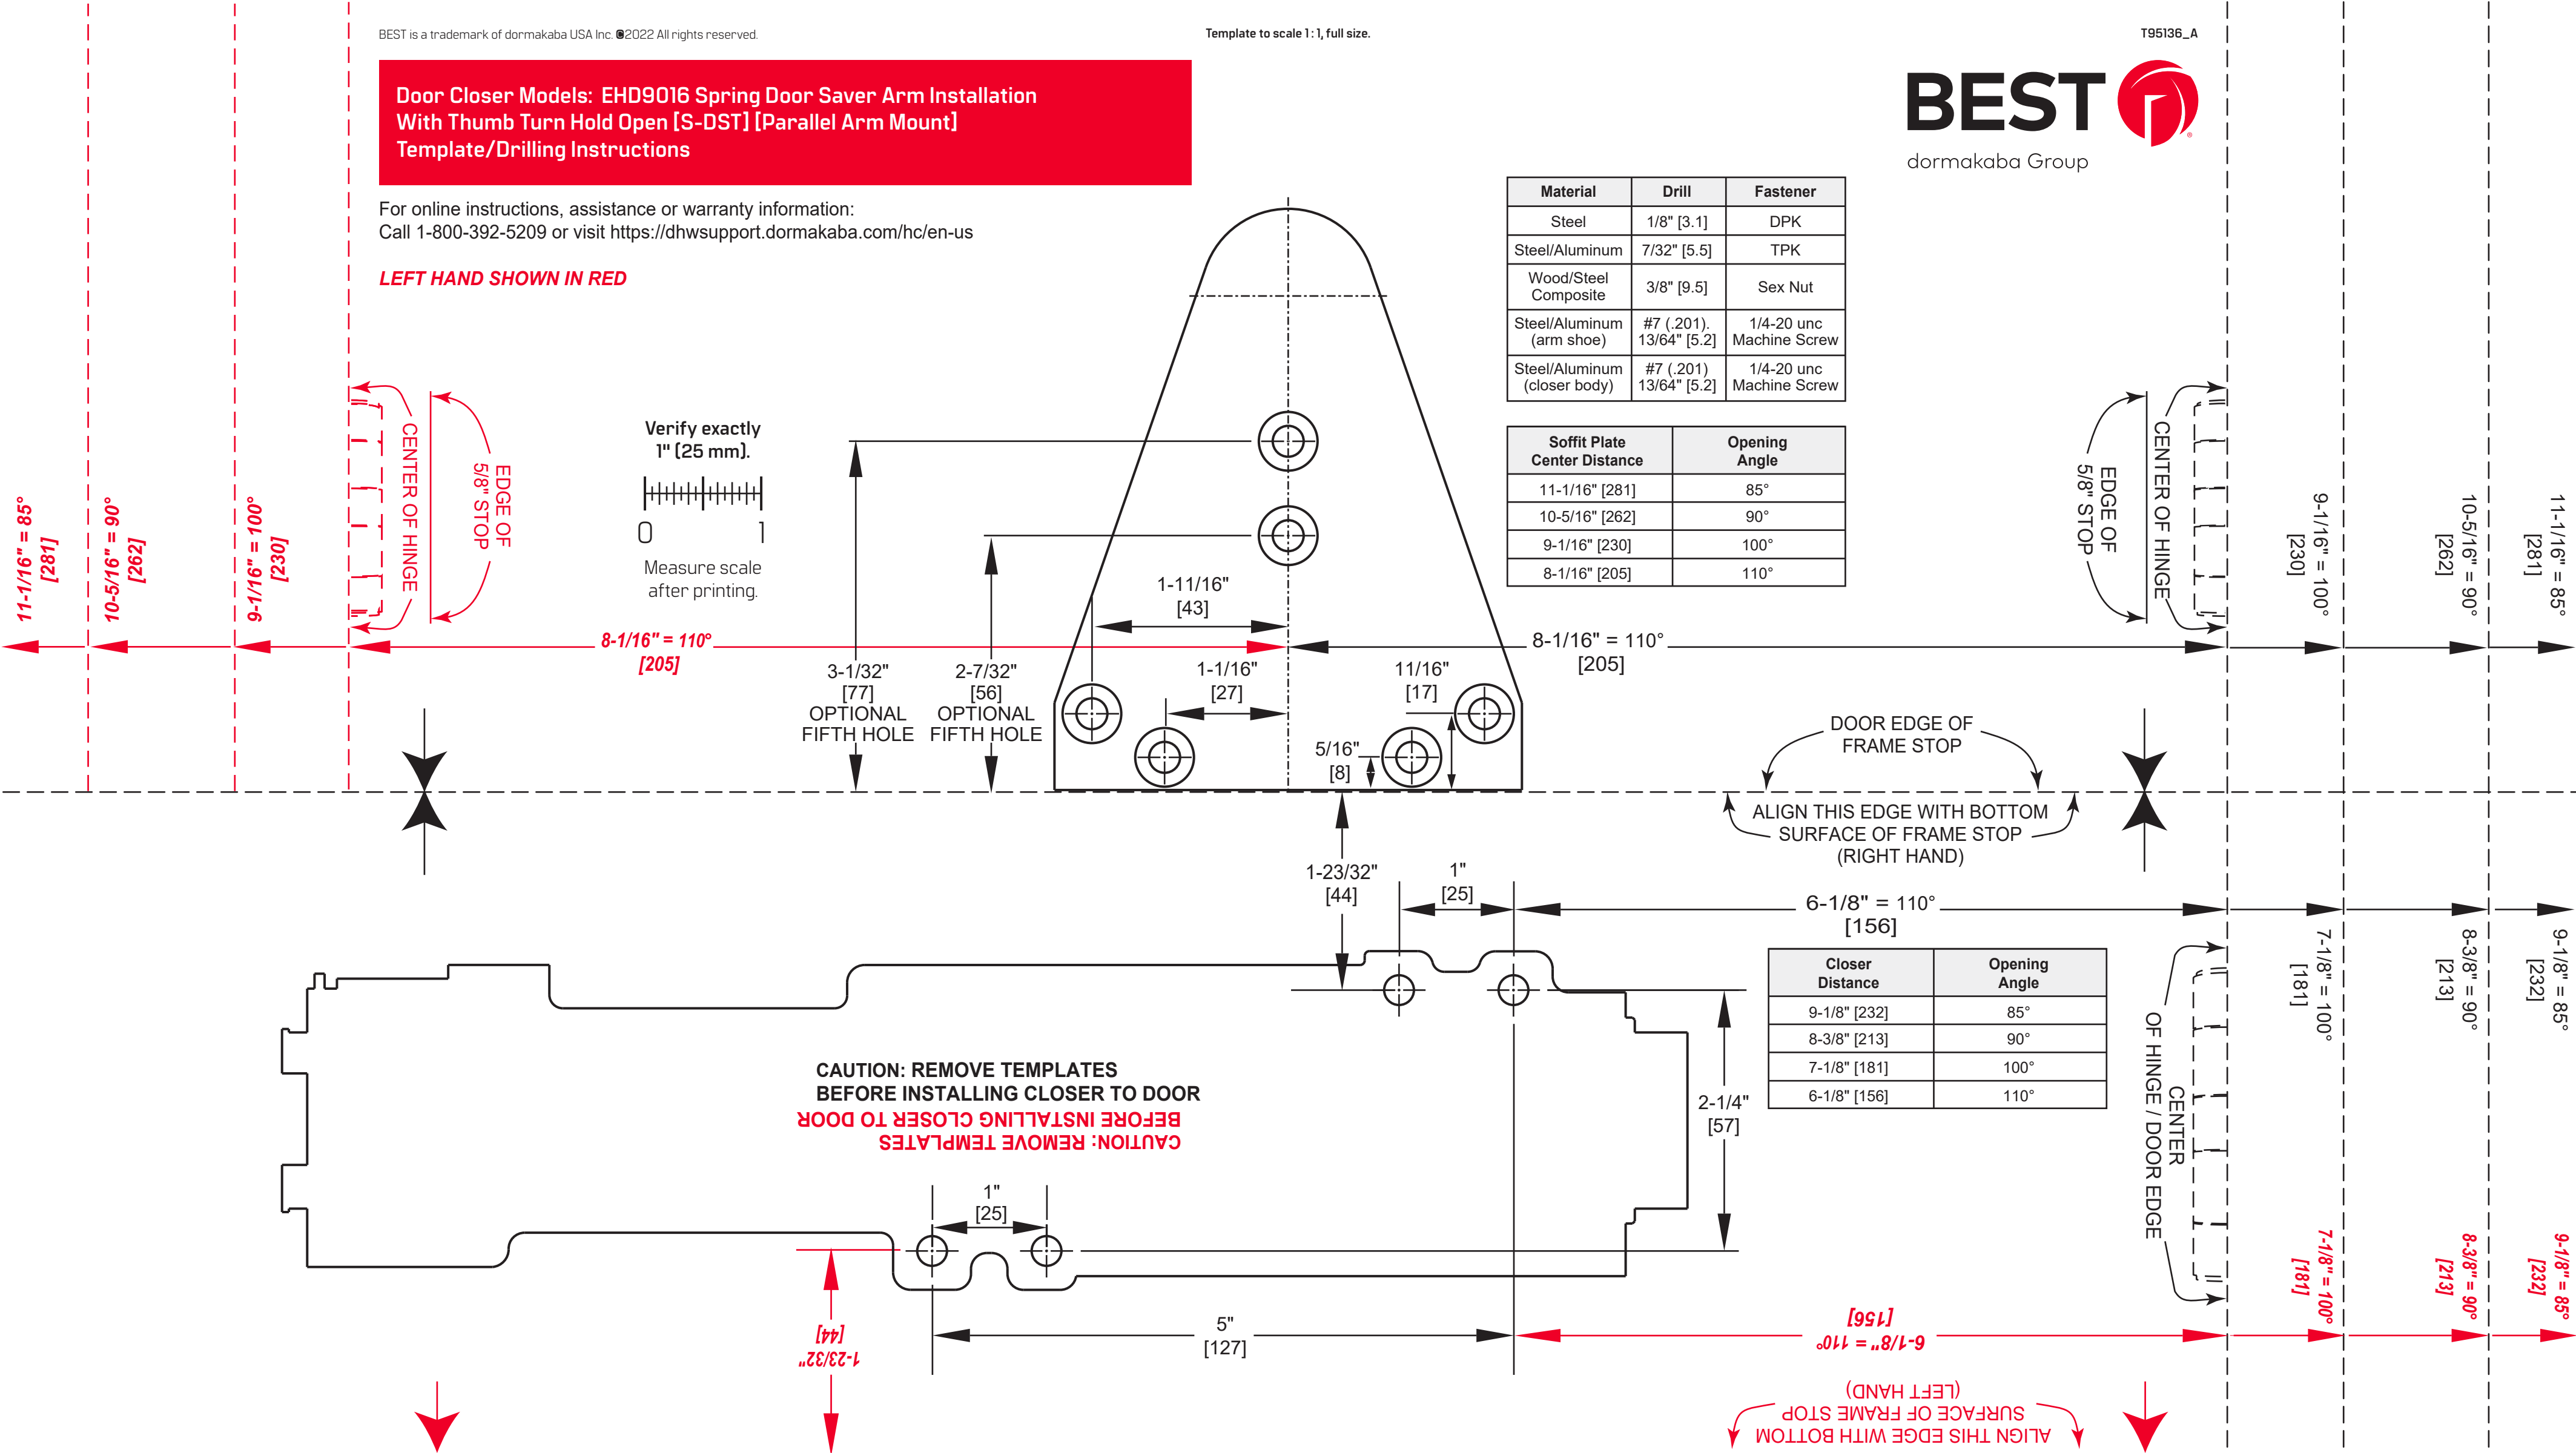

**CAUTION: REMOVE TEMPLATES BEFORE INSTALLING CLOSER TO DOOR**  
**CAUTION: REMOVE TEMPLATES BEFORE INSTALLING CLOSER TO DOOR**

Closer Distance	Opening Angle
9-1/8" [232]	85°
8-3/8" [213]	90°
7-1/8" [181]	100°
6-1/8" [156]	110°