

**Door Closer Models: EHD9016 Heavy-Duty Parallel Arm Installation With Thumb Turn Hold Open [SPAT] [Push Side Mount] Template/Drilling Instructions**




For online instructions, assistance or warranty information:  
Call 1-800-392-5209 or visit <https://dhwsupport.dormakaba.com/hc/en-us>

**LEFT HAND SHOWN IN RED**

Material	Drill	Fastener
Steel	1/8" [3.1]	DPK
Steel/Aluminum	7/32" [5.5]	TPK
Wood/Steel Composite	3/8" [9.5]	Sex Nut
Steel/Aluminum (arm shoe)	#7 (.201). 13/64" [5.2]	1/4-20 unc Machine Screw
Steel/Aluminum (closer body)	#7 (.201). 13/64" [5.2]	1/4-20 unc Machine Screw

Soffit Plate Center Distance	Opening Angle
11-3/4" [298]	90°
8-1/8" [206]	125°

Verify exactly 1" [25 mm].  
Measure scale after printing.

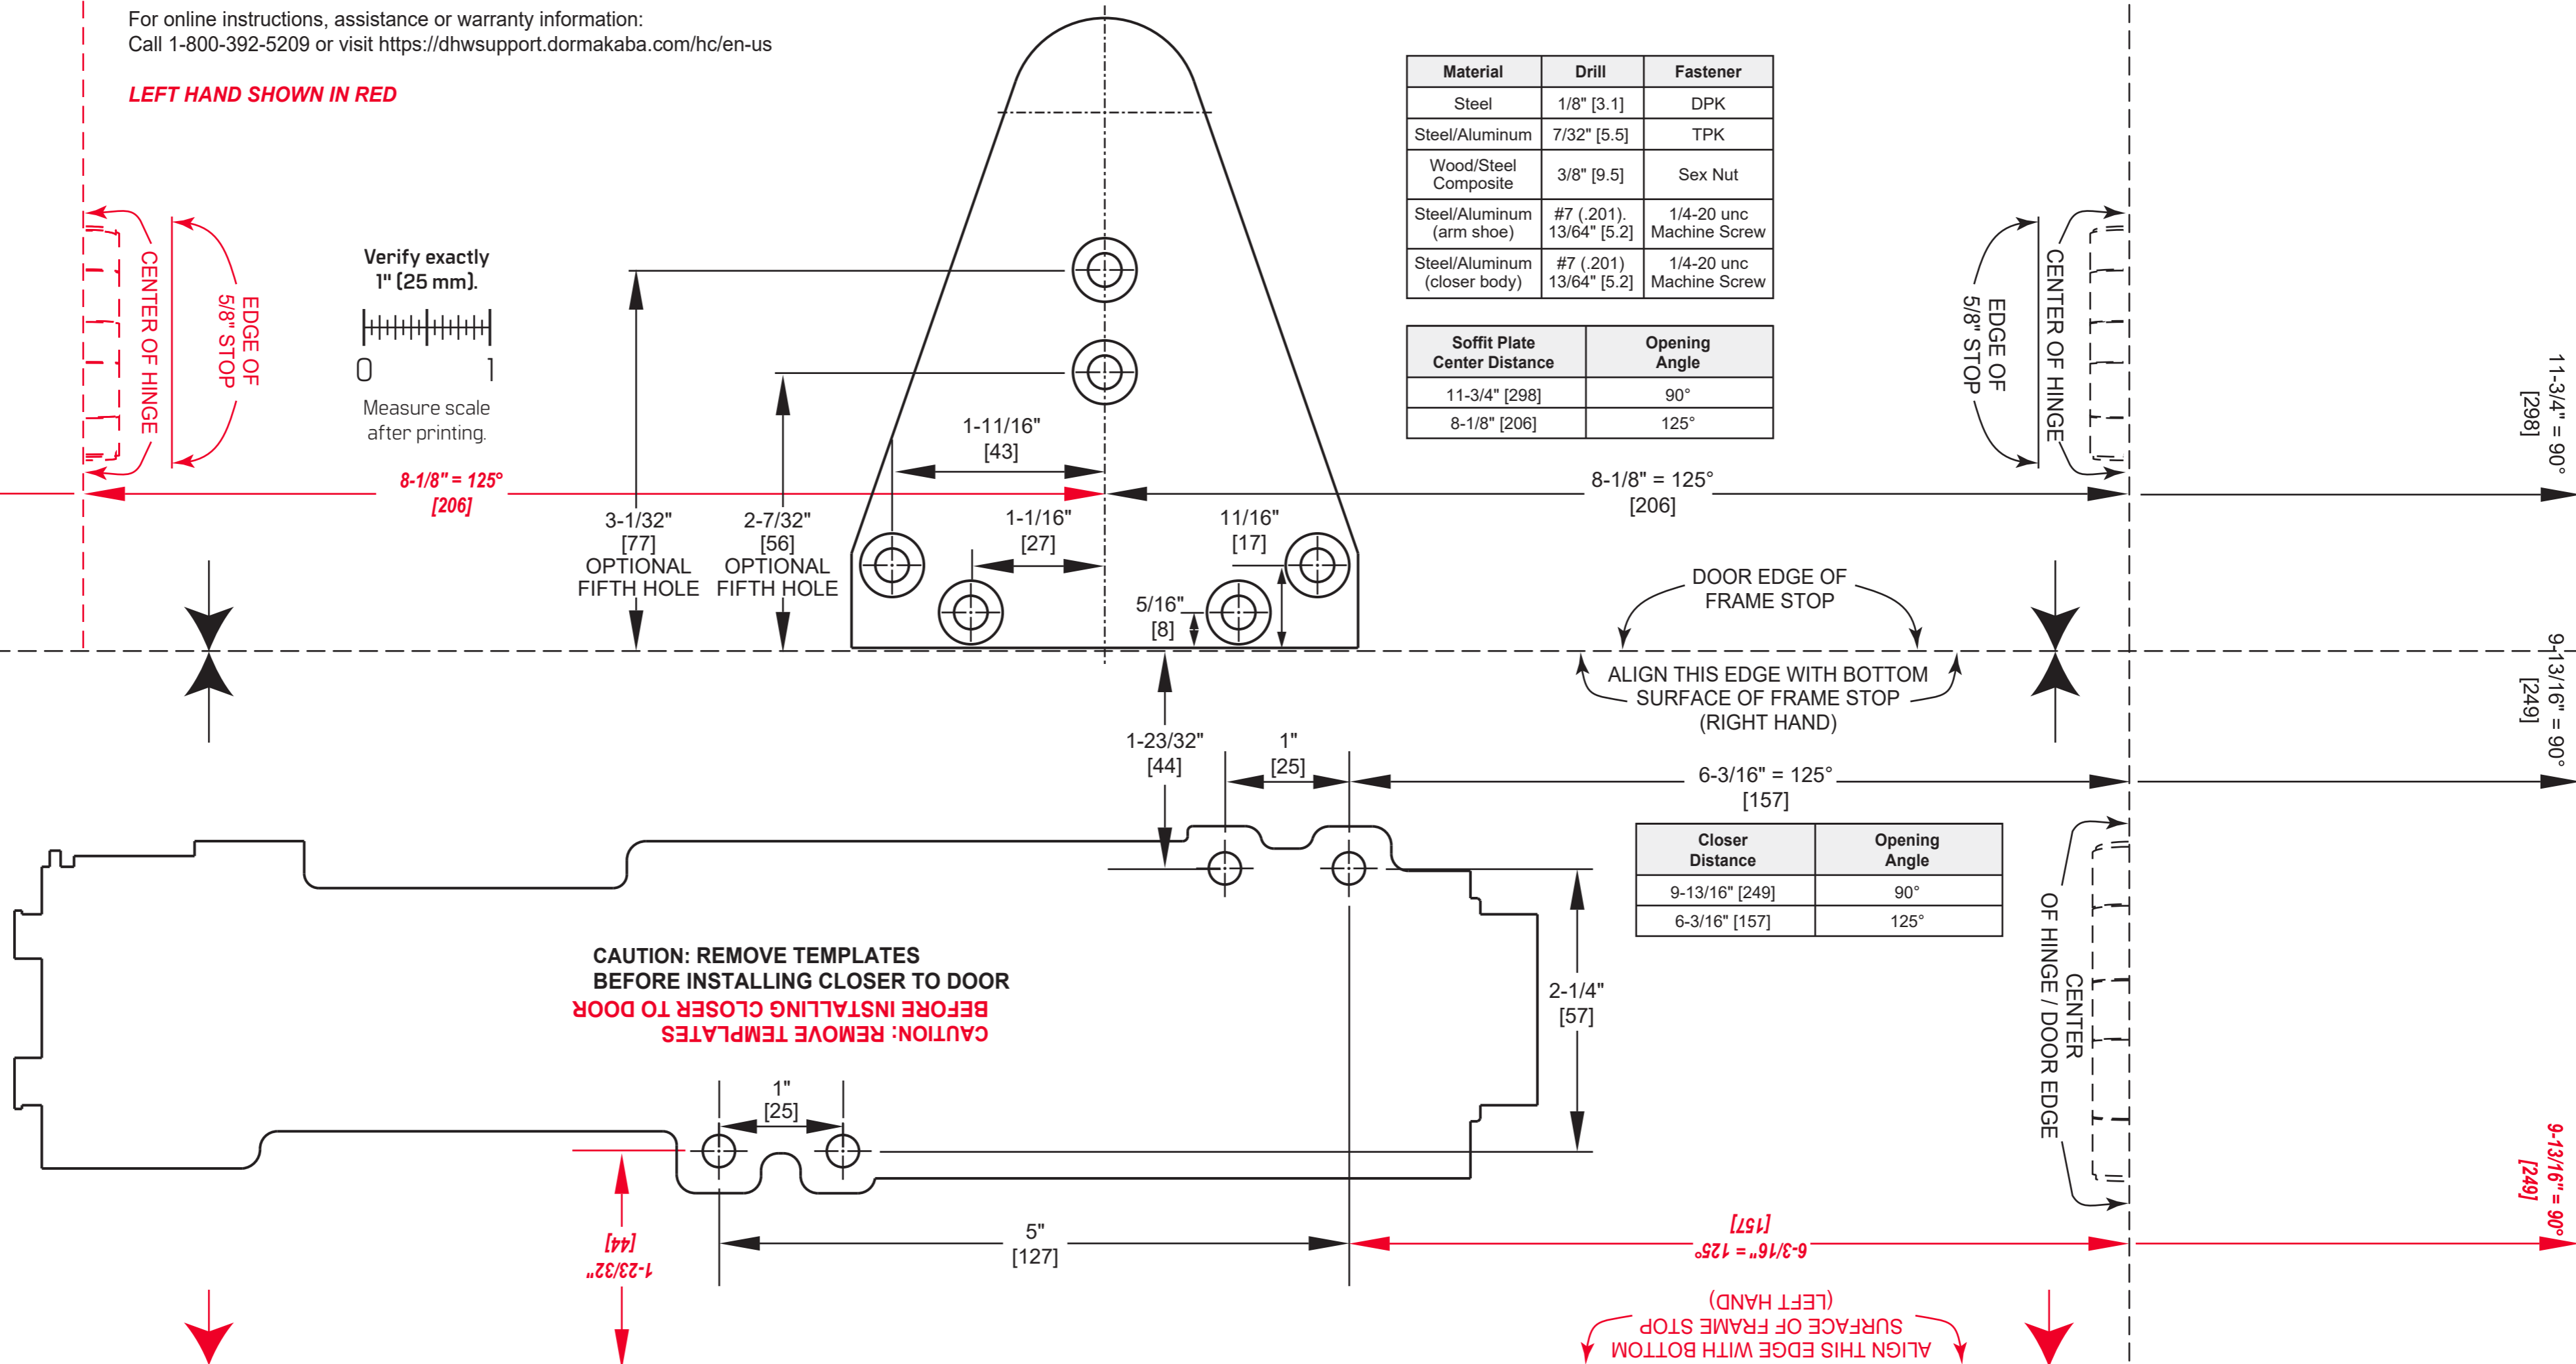

**CAUTION: REMOVE TEMPLATES BEFORE INSTALLING CLOSER TO DOOR**  
**CAUTION: REMOVE TEMPLATES BEFORE INSTALLING CLOSER TO DOOR**

Closer Distance	Opening Angle
9-13/16" [249]	90°
6-3/16" [157]	125°

ALIGN THIS EDGE WITH BOTTOM SURFACE OF FRAME STOP (LEFT HAND)