

45H vestibule function


Supplemental Instructions

Tools needed: Phillips screwdriver Hex wrench Spanner wrench




1 Installing outside trim cassette

- 1.1 Slide outside trim cassette through mortise case.

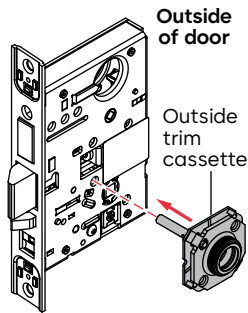


2 Securing dummy trim assembly and inside mounting assembly plate

- 2.1 Position dummy trim assembly against mortise case.
2.2 Secure inside mounting assembly plate over dummy trim assembly using two cassette mounting screws.

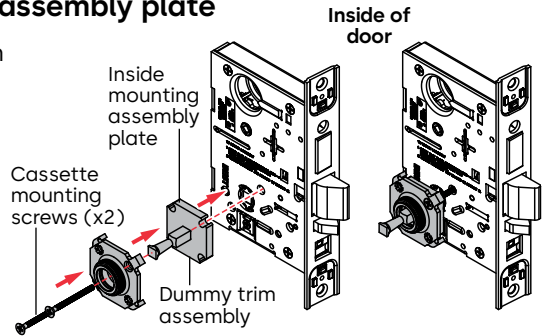

3 Installing inside rose, rose ring and lever

- 3.1 Position rose over inside mounting assembly.
3.2 Position rose ring inside of rose and use included spanner wrench to twist clockwise until secure.
3.3 Slide inside lever through rose ring and secure using set screw and 5/16" [7.94] hex key.



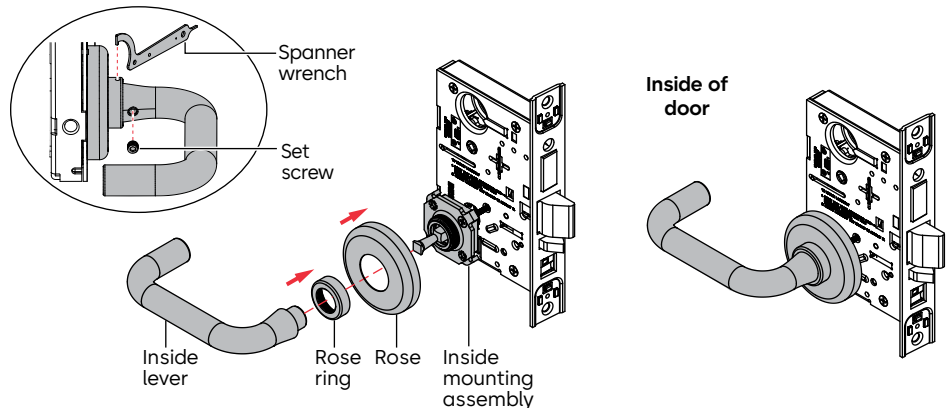


4 Installing hook spindle, outside rose, rose ring and lever.

- 4.1 Slide upper hook spindle through trim cassette, pressing upward until latch aligns with divot in mortise hub; hold in position.

- 4.2 Slide lower spindle inward until pin holes align.
4.3 Secure assembly with pin.
4.4 Refer back to step 3 to secure outside rose, rose ring and lever.

Upper hook spindle — Pin
Lower hook spindle

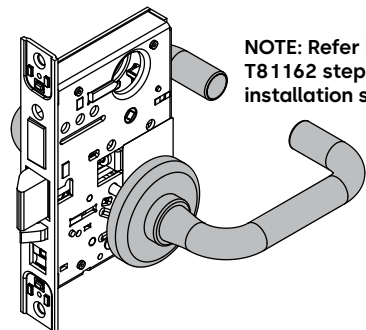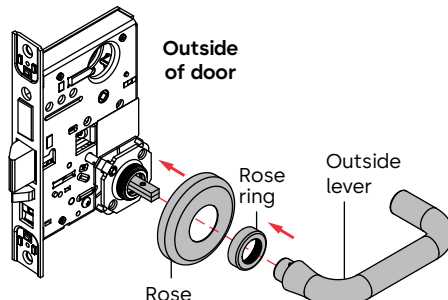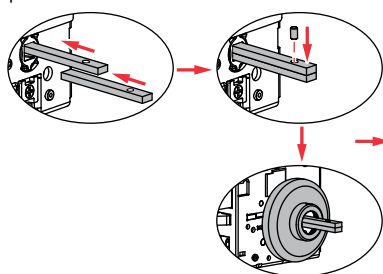

NOTE: Refer back to T81162 step 8 for final installation steps.



Document translations available.
Scan for product details and downloads.
Call 1-800-392-5209 or visit
<https://dhwsupport.dormakaba.com/hc/en-us>
for assistance and warranty information.

WARNING! This Manufacturer advises that no lock can provide complete security by itself. This lock may be defeated by forcible or technical means, or evaded by entry elsewhere on the property. No lock can substitute for caution, awareness of your environment, and common sense. Builder's hardware is available in multiple performance grades to suit the application. In order to enhance security and reduce risk, you should consult a qualified locksmith or other security professional.