


34HW-37HW Strike & Box

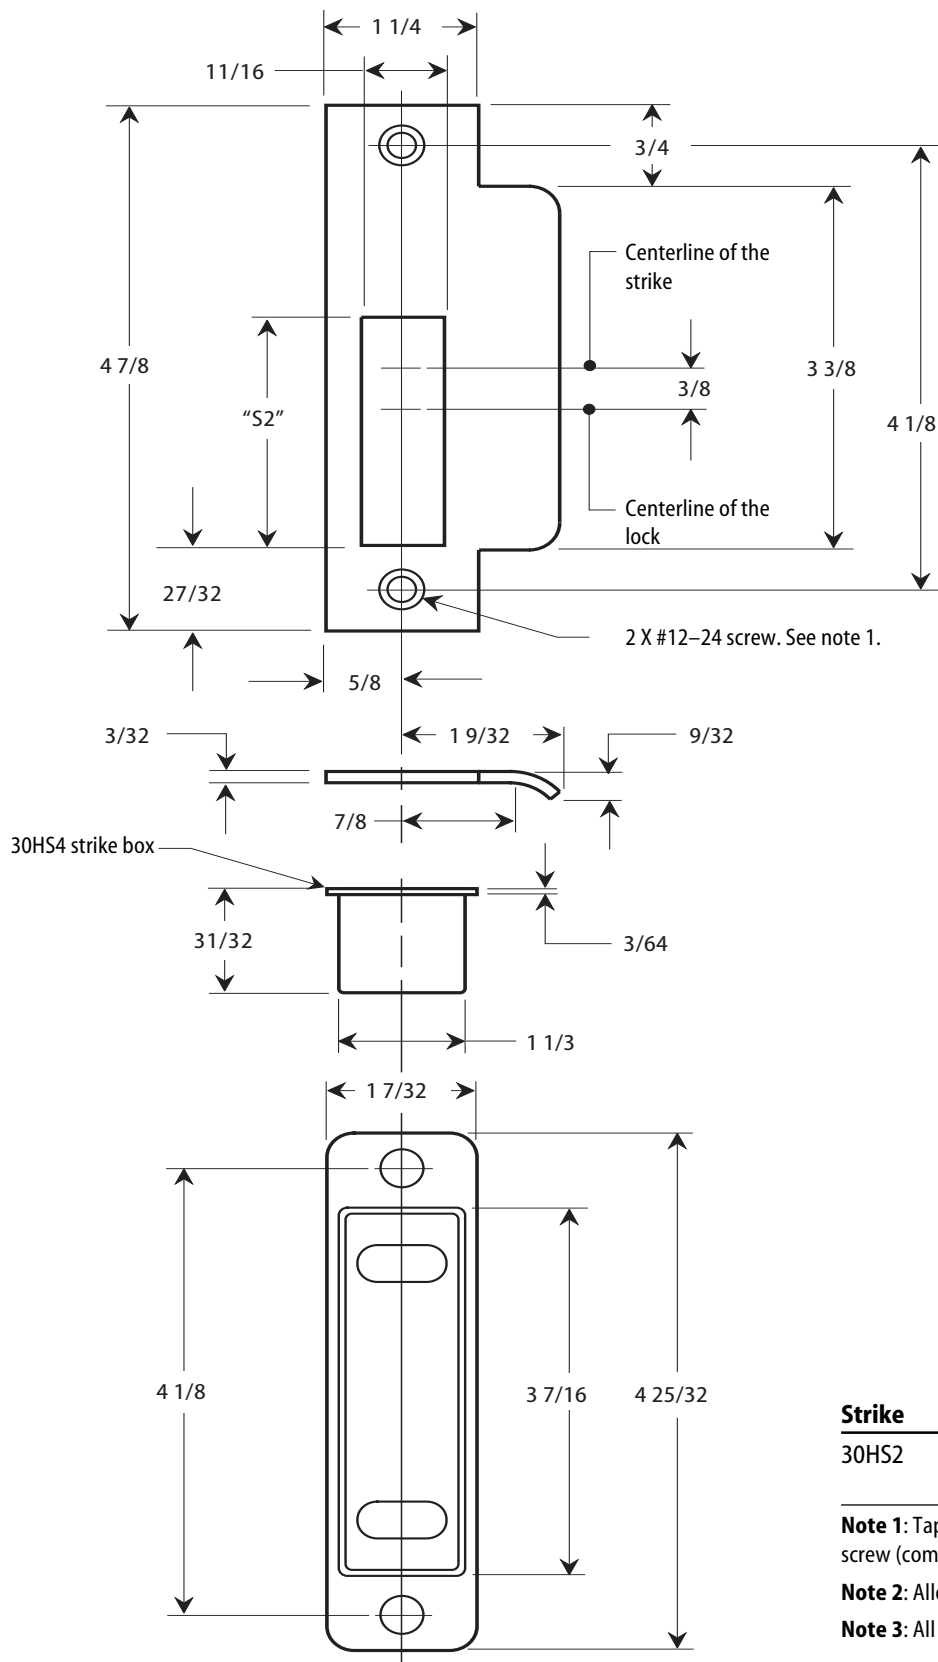

Strike	Dimension	Functions
30HS2	1 13/16"	EWEL, EWEU, WWEU, WWEL, YEU, YEL (specify the hand of door)

Note 1: Tap for a #12-24 machine screw or drill for a #12 wood screw (combination screws are supplied).

Note 2: Allow plus tolerance (1/64") for clearance per ANSI A115.1.

Note 3: All dimensions are in inches.

Title Strike Specification for 34HW-37HW Electrified Mortise Locks				BEST ACCESS SYSTEMS		
Series 34HW-37HW	Backset 2 3/4"	Trim style A, B, C, D, H, J, M, N, S	Door thickness	Rev date 06/2003	Template number W27	Rev -