

Maintenance of F and FBB Hinges

1

MAINTAINING F AND FBB HINGES

- 1.1 Lubricate hinges every six months.
- 1.2 Use Shell Darina #2 or equivalent heavy bearing grease.
- 1.3 Wipe excess grease and dirt from hinge.


NOTE: This is a general procedure and it should be recognized that high use of door openings or exterior applications may demand more frequent servicing.

2

LUBRICATING HINGES

- 2.1 Extract pins.
- 2.2 Wipe or dip with grease.
- 2.3 Reinsert pin.

NOTE: Grease will work into load bearing surfaces. Wipe excess and dirt from hinge.

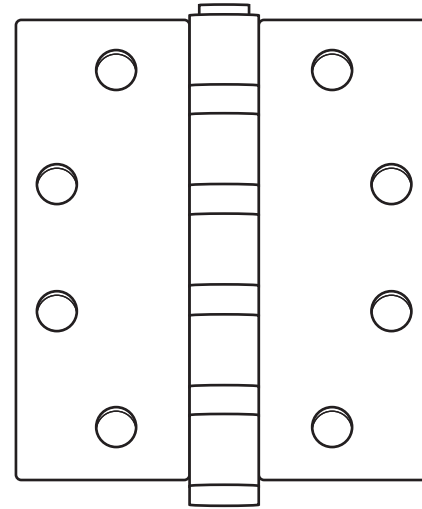

Scan for product details and downloads.
Call 1-800-392-5209 or visit
<https://dhwsupport.dormakaba.com/hc/en-us>