

SURFACE VERTICAL ROD EXIT DEVICES



S300

Olympian 200 Series - Non Handed

Olympian FL200 Fire Exit Series - Non Handed

DOORS - For all types of single and double door applications. Available for 1-3/4" to 2-1/4" thick, up to 4'-0" wide by 10'-0" high openings. For thicker doors, consult factory. Furnished standard for 1-3/4" thick, 3'-0" wide by 7'-0" high openings.

DEVICE - Covers ANSI A115.2 (Type 161), A115.18 cylinder lock and A115.1 (Type 86) Mortise Lock preparation.

FUNCTIONS - Functions are field selectable. The device is furnished for a desired function if specified. If not specified the "03" function is furnished standard.

COVERS - Lock Stile and Hinge Stile Assembly, Cold drawn Bronze, Brass, Stainless Steel.

CHASSIS - Lock Stile and Hinge Stile Assembly, Investment Cast Steel, Zinc Dichromated.

CROSSBAR HEIGHT - 34-5/8" to centerline from finish floor standard. May be varied as situation dictates, consult factory.

DOGGING - Hex Key dogging standard for Panic Hardware. NOT available on Fire Exit Hardware.

UL LISTED - Panic and Fire Exit Hardware. For FIRE EXIT HARDWARE Ratings see page 15. Conforms to UL10C and UBC 7-2.

ANSI/BHMA - Devices are BHMA certified for ANSI 156.3, Grade 1.

FINISHES - 605, 606, 612, 613, 625, 630. For Finish description see page 3.

CYLINDERS - Rim Type, not furnished standard. Specify when required. For cylinder details see page 13.



CROSSBAR - 1 Bronze, Brass or Stainless Steel tubing furnished standard for a 3-0 Door. For wider doors, specify door width. Knurled and Reinforced crossbars are available.

VERTICAL RODS - Brass, Bronze or Stainless Steel.

TOP LATCHBOLT - Stainless Steel, Deadlocking, 3/4" throw.

BOTTOM BOLT - Steel plated, independent action 5/8" throw, with adjustment range to suit 3/4 door undercut.

TOP STRIKE - No. S300, Investment Cast Stainless Steel, Black Powder Coated.

BOTTOM STRIKE - No. S460, Steel, Black Powder

LESS BOTTOM ROD (LBR) OPTION - Specify suffix "LBR" (e.g. 208LBR). See UL FIRE LABEL RATING Chart on page 15. Fire Rated Devices include FB277 Fire Bolt Assembly.

DEVICE OPTIONS

Suffix	Description	Page
CBK	Knurled Crossbar.....	12
CBR	Reinforced Crossbar	12
LBR	Less Bottom Rod.....	6
LD	Less Dogging	12
SNB	Sex Nut and Bolt	3
SEC	Security Screws.....	3
TMB	Transom Bracket	12

To specify add Prefix to Device No. (e.g. 203LBR)



S460

STANLEY



1700A
"A" Grip



1700B
"B" Grip



1700C
"C" Grip



2000C
"C" Grip



1. All Trims are furnished with wrought plates, extruded or cast solid grips.
2. Specify Grip Design (A,B,C) ("A" Grip furnished standard for 1700 Series Trim, "C" Grip furnished standard for 2000 Series Trim)

4900A
"A" Lever



4900B
"B" Lever



4900C
"C" Lever



4900D
"D" Lever



4900K
"K" Knob




V4908A
Vandal Resistant Trim

A heavy duty lever trim designed to withstand abuse and vandalism. Composed of extra strength shock-absorbing "overload" springs and heavy duty investment cast stainless steel internal components. Lever returns to the "home" position eliminating the need to reset the lever.

1. All the escutcheons and levers are castings or forgings.
2. Specify Lever or Knob Design (A,B,C,D,K) and Handing ("A" Lever RHRB furnished standard).
3. 626 Trim is furnished for 630 Devices.
 - For Trim dimensions see page 13.
 - Trims are BHMA certified for ANSI 156.3, Grade 1.
 - Trims are through bolted and will cover 161 and 86 cutouts (except for 2000C Trim).
 - Cylinder, Rim Type, not furnished standard. For cylinder details see page 13.
 - Trim No.s with prefix "Y" are for Olympian Devices only.

ANSI Function	01 Exit Only (cover plate)	02 Dummy Trim	03 Key Retracts Latchbolt	05 Key Locks/Unlocks Thumbpiece	08 Key Locks/Unlocks Lever/Knob	14 No Cylinder Lever/Knob Always Active	15 No Cylinder Thumbpiece Always Active
Device Nos.	201 FL201	202	203 FL203	205 FL205	208 FL208	214 FL214	215 FL215
Trim Nos.	1701 2001 4901	1702A 2002C 4902A	1703A 2003C 4903A	1705A 2005C	Y4908A Y4908A	Y4914A	Y1715A Y2015C

Device with Trim:

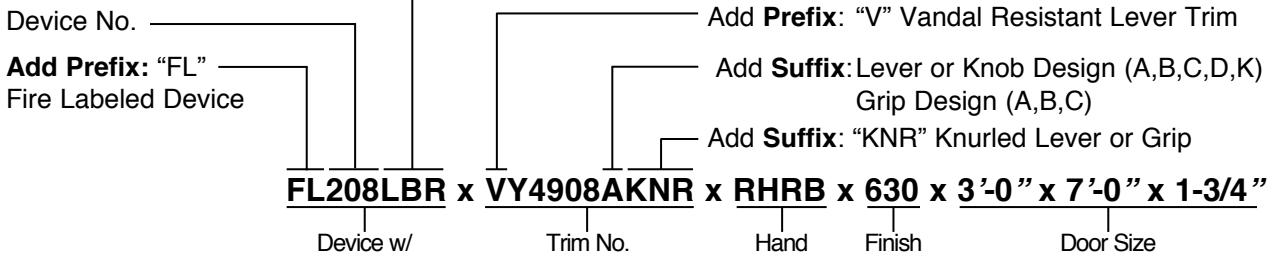

Device Only: Device no., hand, finish, strike, and door size including thickness:
(e.g. FL208CD x RHRB x 630 x 3'-0" x 7'-0" x 1-3/4")

Trim Only: Trim no., hand, finish, strike, and door thickness: (e.g. VY4908A x RHRB x 626 x 1-3/4")

