


8902 TEL

Supplemental Instructions for Installing Telephone Booth Closers

1. Follow procedures per recommended installation instruction (specific arm type) for a standard 8916 closer. Note the adjustments for spring power and sweep speed as described below.
2. To indicate that the telephone booth is not occupied, the closer is factory set to leave the door open. The door must be closed manually from the open position.
3. See Figure A for spring adjustment instructions. The spring adjustment will determine how far the door remains open. Adjustments should be made with the door partially open using a 1/4" wrench or adjustable wrench.
4. Sweep speed must be adjusted clockwise for slow operation or momentum of the door may force the door closed.

Figure A

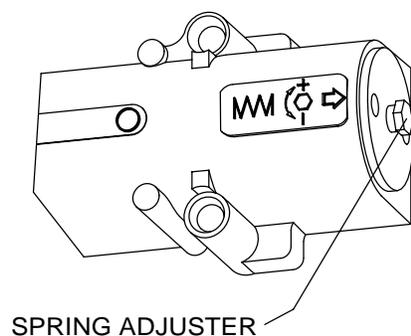

NOTE:

Turn counter-clockwise to increase the degree the door stands open.

Turn clockwise to decrease the degree the door stands open.

