

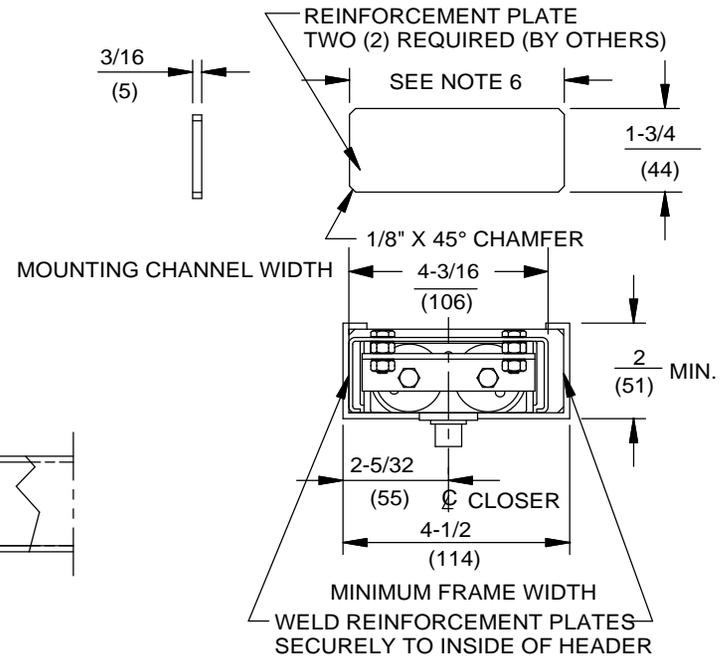
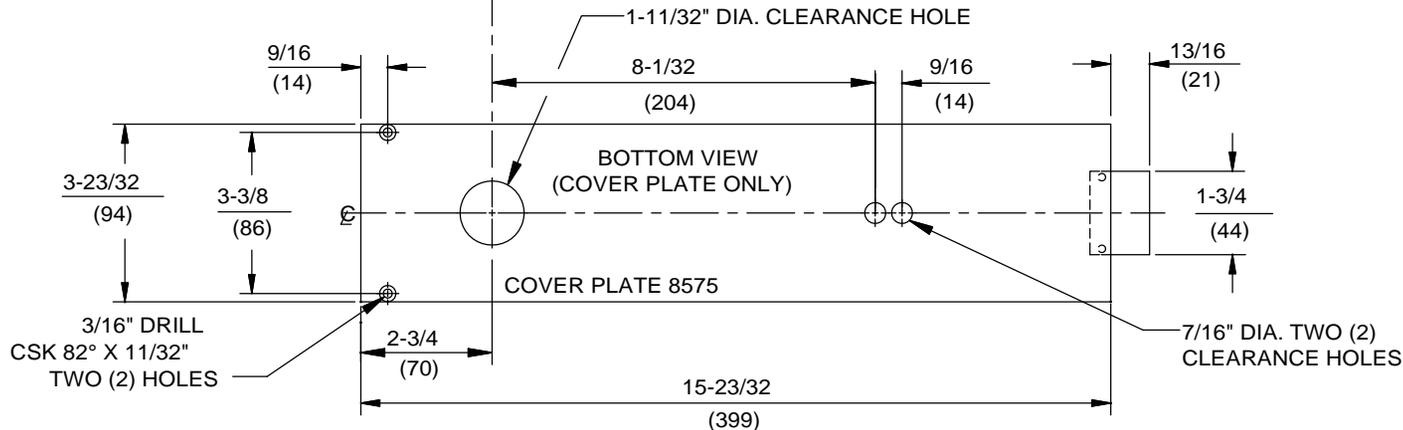


Always consult Dorma's web site for latest template at [www.dorma-usa.com](http://www.dorma-usa.com) or call 1-800-523-8483.





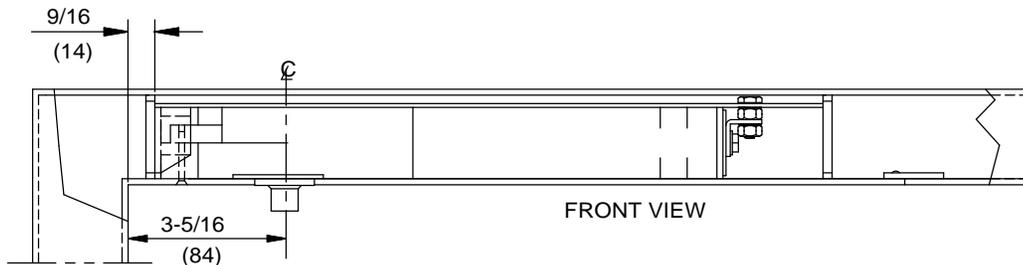


- NOTE:
- DO NOT SCALE DRAWING.
  - DIMENSIONS ARE IN INCHES/(MM).
  - MINIMUM HEADER SIZE 2" X 4-1/2".
  - CUT OUT FOR COVER PLATE 3-3/4" X 15-3/4".
  - CLEARANCE BETWEEN HEADER AND DOOR 1/8".
  - WIDTH OF REINFORCEMENT PLATE TO BE A SLIP FIT INTO INSIDE OF HEADER.
  - 90°HO MODELS NOMINAL HOLD OPEN AT 88°. 105°HO MODELS NOMINAL HOLD OPEN AT 103°.
  - AUXILIARY STOP REQUIRED COINCIDING WITH DEADSTOP ON RTS CLOSER.

DOOR CLOSER MODEL: RTS SERIES PACKAGE 27, STEEL DOOR AND FRAME PREPARATION, DOOR HUNG ON 3/4" OFFSET PIVOTS  
 No. 8532 MOUNTING CHANNEL, No. 8812 TRACK ARM, No. 8575 COVER PLATE

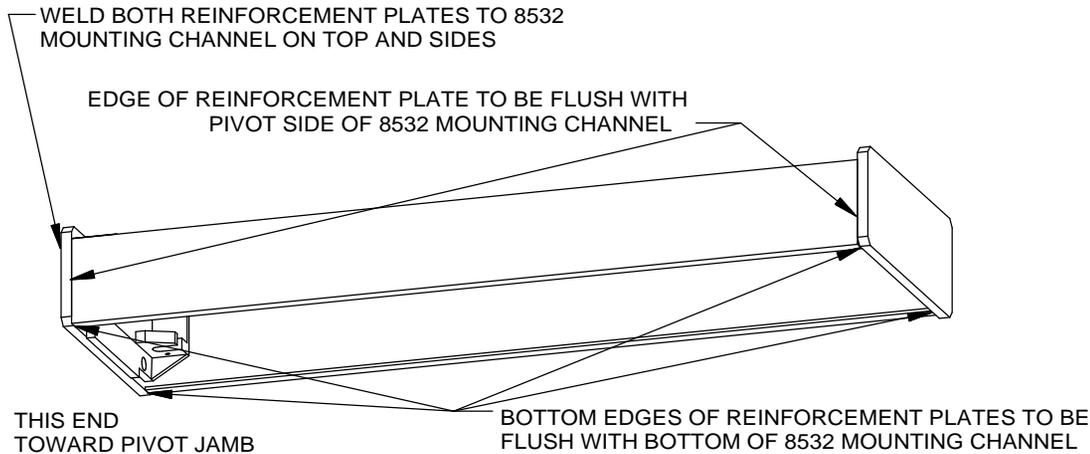

DORMA Door Controls  
 Reamstown, PA 17567

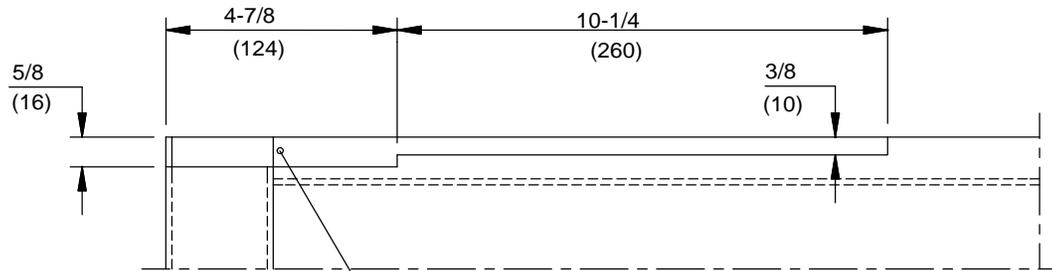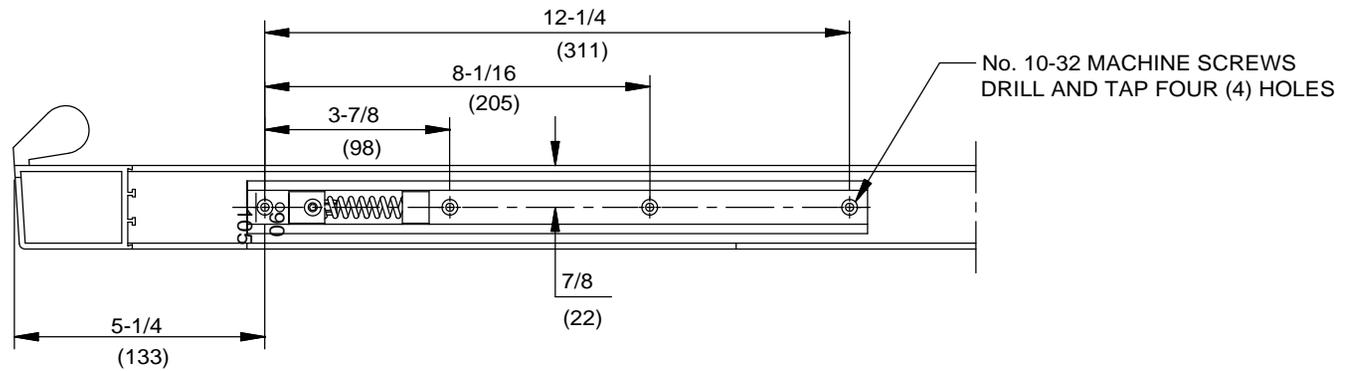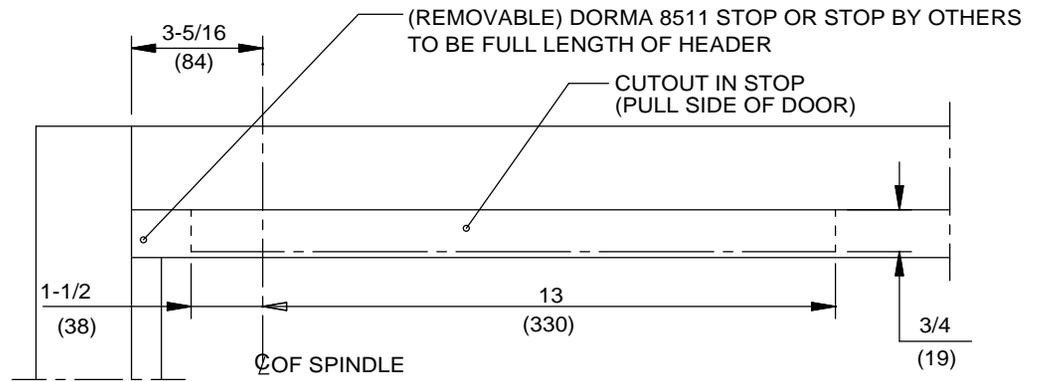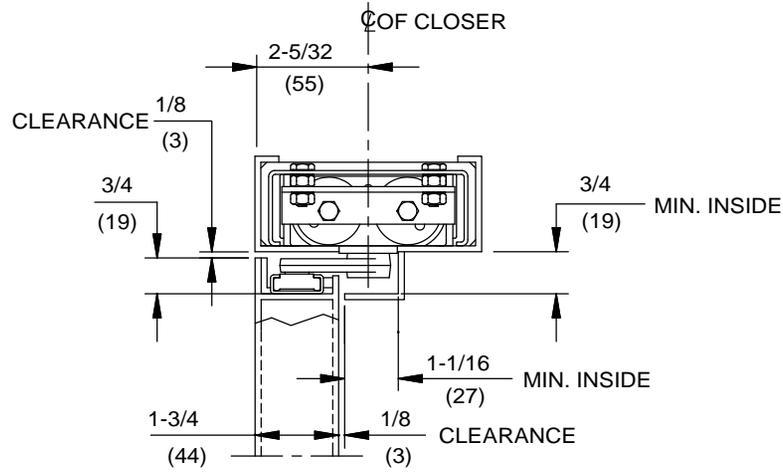

CUT OUT IN PUSH SIDE OF DOOR

Always consult Dorma's web site for latest template at [www.dorma-usa.com](http://www.dorma-usa.com) or call 1-800-523-8483.



DORMA Door Controls  
 Reamstown, PA 17567