



RHR SHOWN
LHR OPPOSITE

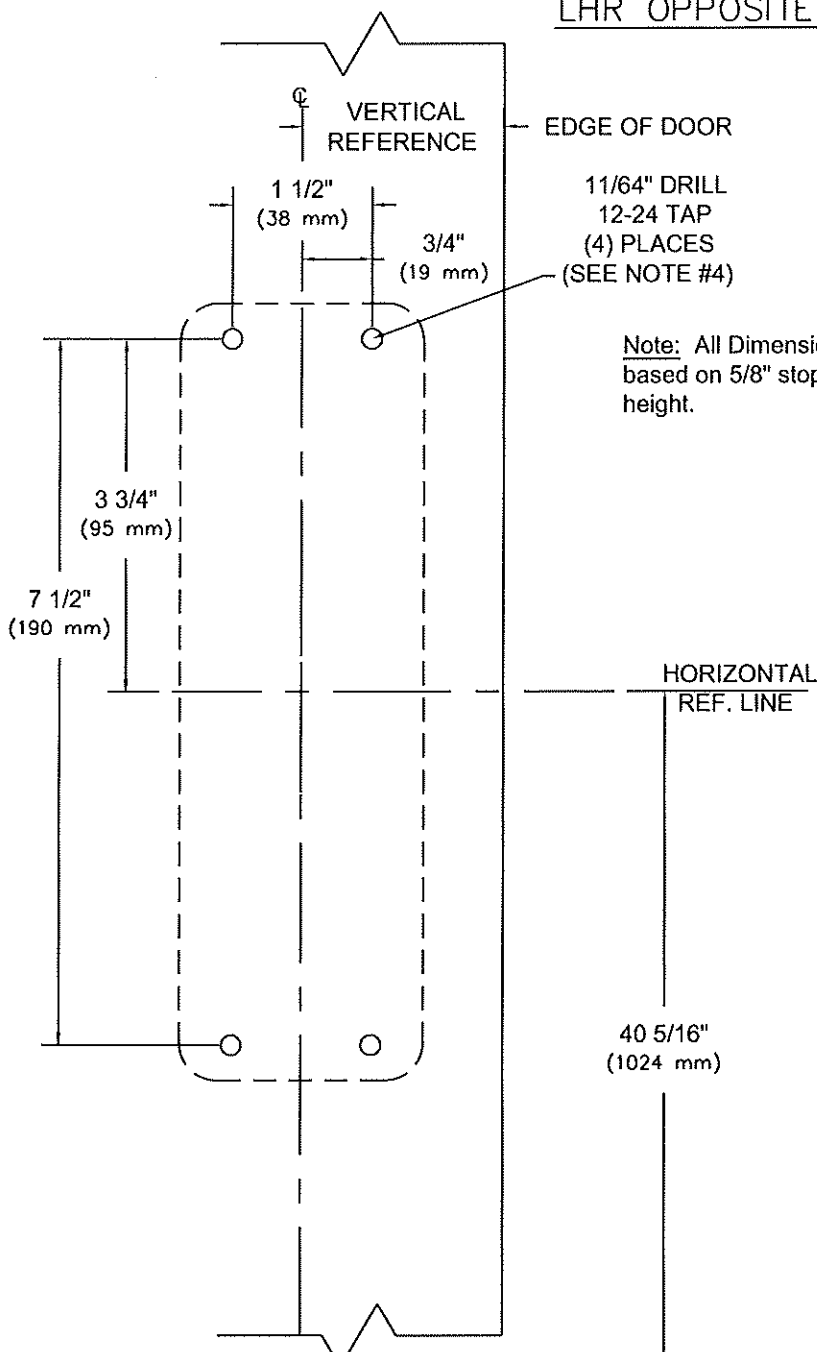


EDGE OF DOOR
11/64" DRILL
12-24 TAP
(4) PLACES
(SEE NOTE #4)


Note: All Dimensions based on 5/8" stop height.

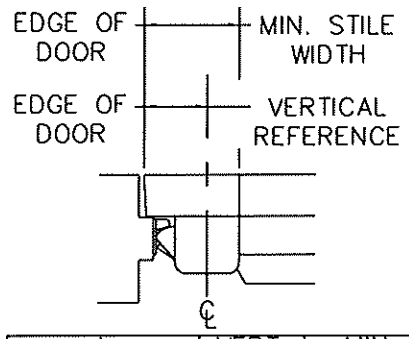

STOP	STRIKE	VERT. REF.	MIN. STILE
BLADE (cutout)	430	2 1/16" (52 mm)	3 1/2" (89 mm)
	486	2 13/16" (72 mm)	4 1/4" (108 mm)
	463	(72 mm)	(108 mm)

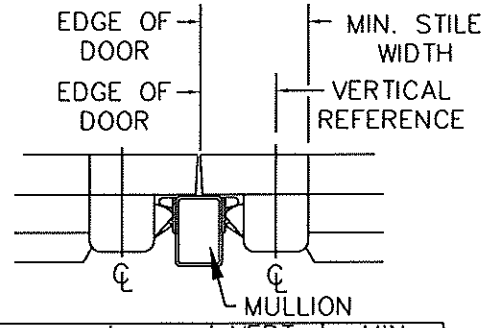

MULLION	STRIKE	VERT. REF.	MIN. STILE
1310	463	2 3/4" (70 mm)	4 3/16" (106 mm)
	486	(70 mm)	(106 mm)
1330	ALL	3" (76 mm)	4 7/16" (113 mm)
		(76 mm)	(113 mm)
F1300	ALL	3 1/4" (83 mm)	4 9/16" (116 mm)
1340KR F1340KR	ALL	3 1/4" (83 mm)	4 9/16" (116 mm)
		(83 mm)	(116 mm)

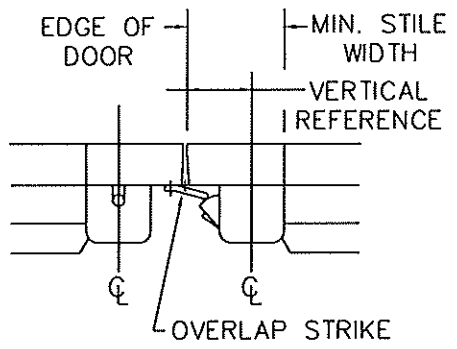

STRIKE	VERT. REF.	MIN. STILE
320	2 1/2" (64 mm)	4" (102 mm)

NOTES: FINISHED FLOOR LINE OR TOP OF THRESHOLD

1. SEE MASTER SHEET #T-0001 FOR SUGGESTED DOOR REINFORCEMENT.
2. SEE ADDITIONAL TRIM TEMPLATE WHEN REQUIRED.
3. DEVICE WILL COVER STANDARD SDI CUTOUT.
4. FOR SEX NUTS USE 3/8" DRILL.

REV. No. 5 REVISION: Update Dimension DATE: 10-10-11



9300 & F9300
RIM TYPE EXIT DEVICE

TEMPLATE NUMBER
T-9300 ⑤