

NOTE: ON 2" STILES OR LESS LATCH CENTER LINE IS 1/16" LESS THAN DEVICE

REINFORCEMENT MAY BE REQUIRED TO MAINTAIN 1/4" AND TO PROVIDE SUPPORT FOR MOUNTING.

NOTE: OUTER MOUNTING ANGLE MAY BE OMITTED ON NON-FIRE RATED DOORS HAVING LESS THAN 2 3/8" BACKSET.

NOTES:

SEE MASTER SHEET #T-0001 FOR SUGGESTED DOOR REINFORCEMENT
 SEE ADDITIONAL TRIM TEMPLATES FOR OUTSIDE TRIM (WHEN REQUIRED)
 SEE T-9600WD AND T-9600WDEG FOR WOOD DOOR PREPS.

	BACKSET	MIN. STILE
MINIMUM	1 1/4"	2 1/16"
F9600	2 3/4"	3 3/16"

BACKSET	MIN. STILE
1 5/8"	2 7/16"


REV. No. 0 REVISION: DATE: 2-2-2010



9600 & F9600 x EXIT ONLY WITH TRIM
 CONCEALED VERTICAL ROD TYPE
 EXIT DEVICE

TEMPLATE NUMBER
 T-9602©

RHR SHOWN
LHR OPPOSITE

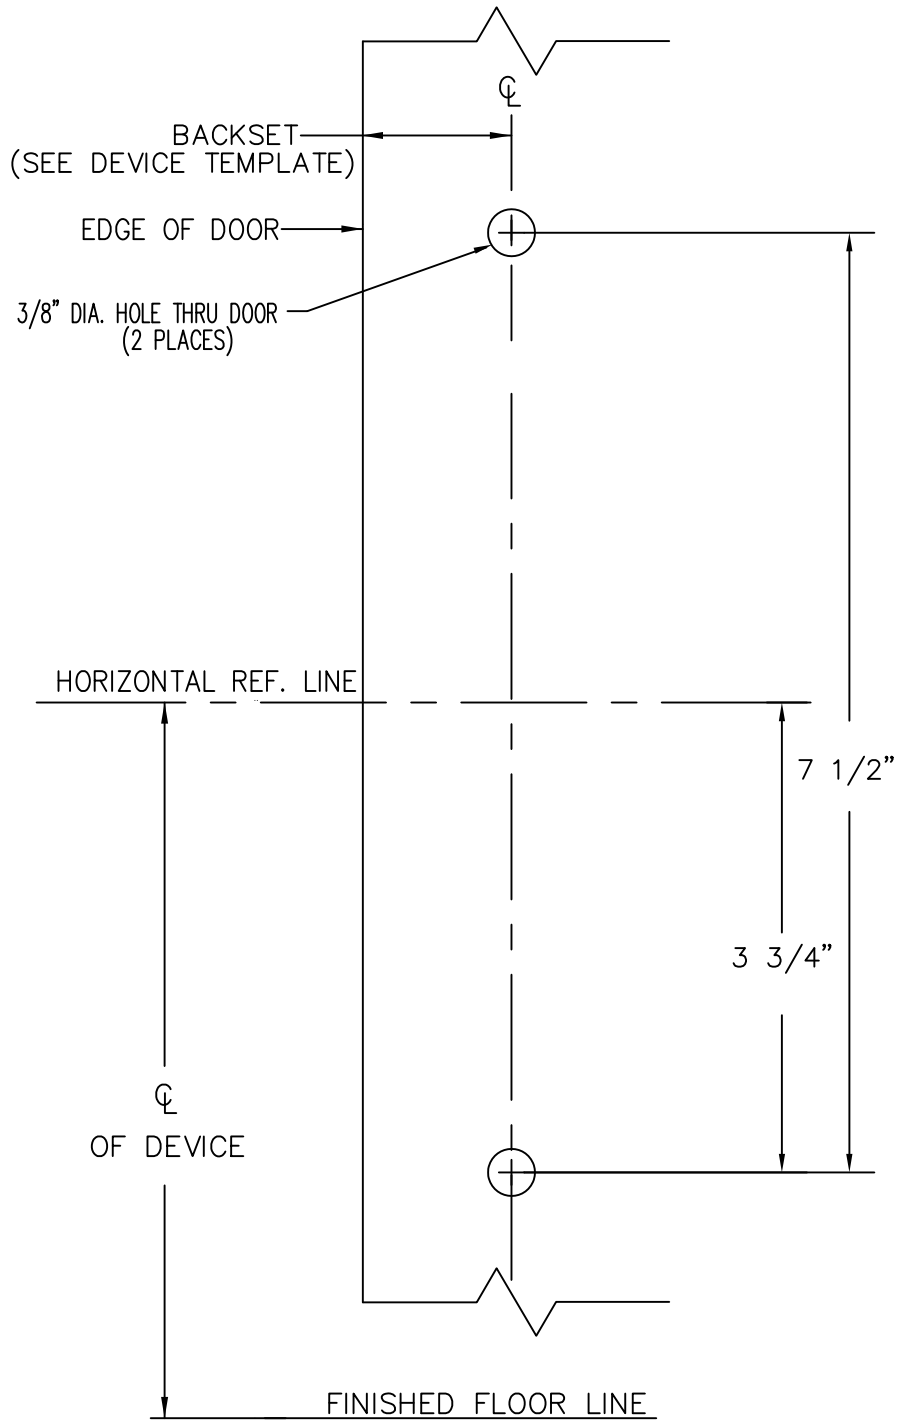

NOTES:

1. SEE MASTER SHEET #T-0001 FOR SUGGESTED DOOR REINFORCEMENT.

REV. No. 1

REVISION: Lever Style Notes

DATE: 1-22-2014



OP02, ZP02, ZODT
Z*02R Trim

Note; * Denotes all Lever Design Styles

TEMPLATE NUMBER
T-9031 ①