

J300 Series

Grade 2

interconnected locksets



J300 Series Grade 2 interconnected locksets

The J300 is an ANSI/BHMA certified Grade 2 interconnected lockset geared for light-duty, commercial applications where single motion egress is required.

The J300 features a 2-1/2" diameter rose and is suited for multifamily apartment units, condominiums, hotels, assisted living, and other commercial facilities of a light duty type.

Features

- Concealed fasteners on outside rose
- Fits door with 4" and 5-1/2" hole centers
- Door thickness range from 1-3/8"–1-3/4"
- 1/2" throw latch.
- Available backsets: 2-3/8" or 2-3/4"
Please specify when ordering
- 2-1/2" diameter rose
- Non-handed for easy installation
(LS lever is handed)

Certification

- ANSI/BHMA
- A156.2 Grade
- 2 certified.
- UL listed 3 hour fire rated.
- Meets A117.1 accessibility code and ADA requirements for barrier-free accessibility.
- Single motion egress meets life safety code requirements

Finishes

- 605 (Bright Brass)
- 613 (Dark Bronze)
- 619 (Satin Nickel)
- 626 (Satin Chrome)

Lever styles

- LR, LC, LG, LS

Recommended applications

- Apartments
- Assisted living
- Condominiums
- Other multifamily housing

Warranty

For details, refer to Limited Warranty on our website.



Intertek



Intertek

DORMA USA quality and environmental management systems in Reamstown, PA and Steeleville, IL are certified to ISO 9001:2008 and ISO 14001:2004.


Finish availability chart

	626	613	619	605
LR	•	•		
LC	•	•		•
LG	•	•	•	
LS		•	•	•


Trim options

Lever designs


LC Lever




LG Lever




LR Lever




LS Lever




L118 Lever





How to order J300 series locks

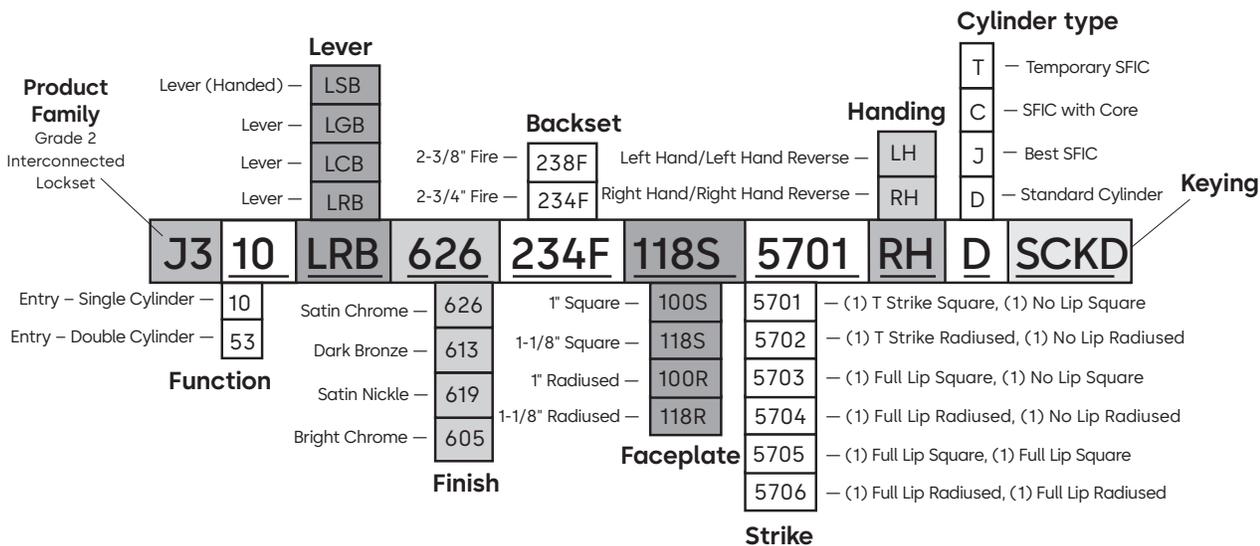

How to order keyways

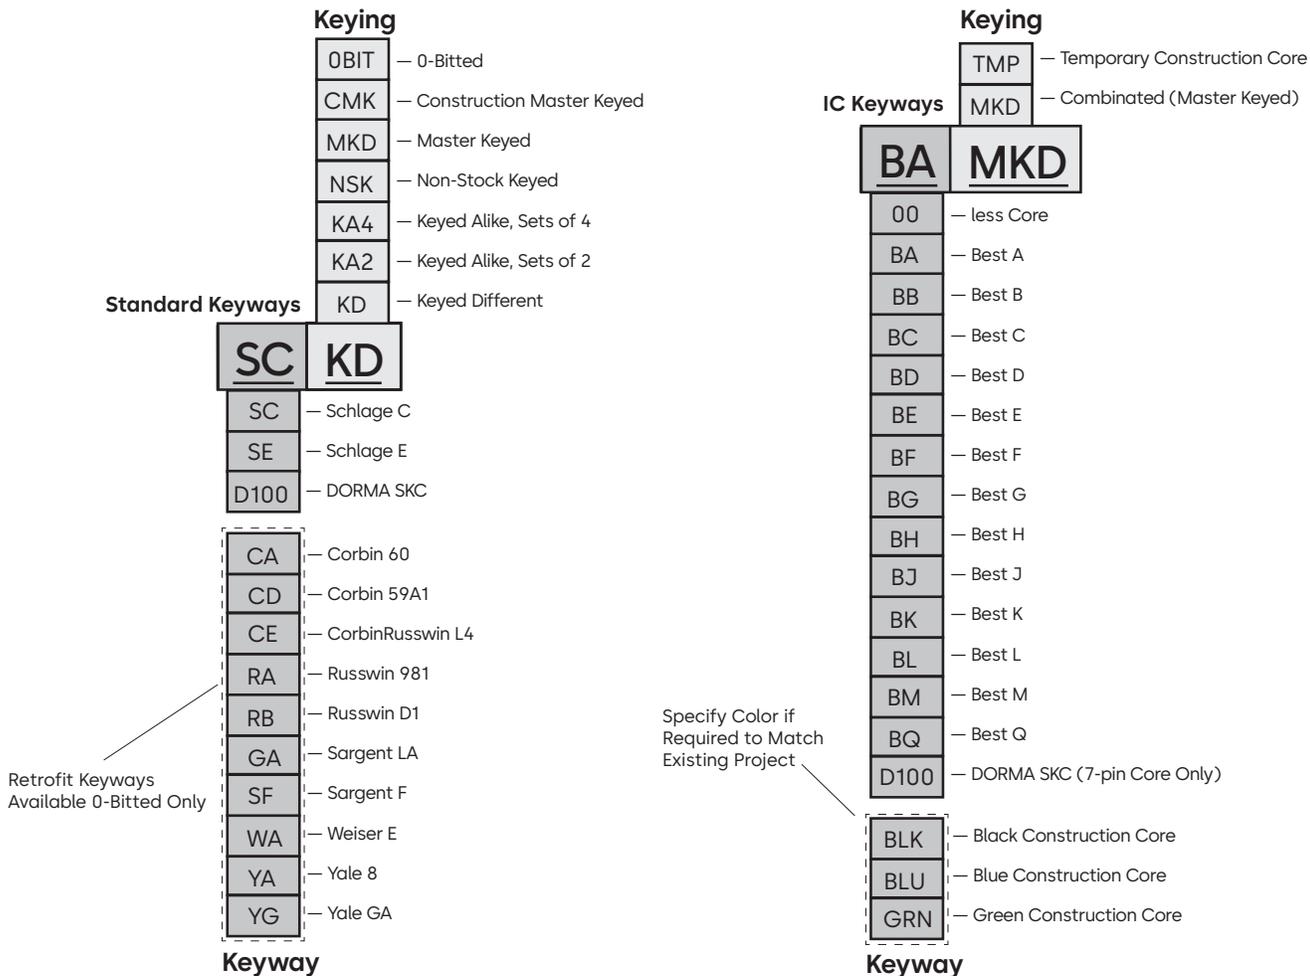


Functions

Function	Series	Outside/Inside	Description
Entry Single Cylinder	J310	 F95	<ul style="list-style-type: none"> • Latch bolt operated by trim either side. • Dead bolt operated by key outside or turn inside. • Dead bolt and latch bolt retracted simultaneously by trim inside.
Entry Double Cylinder	J353	 F97	<ul style="list-style-type: none"> • Deadlocking latch bolt operated by trim either side, except when outside trim locked by turn button inside. • When outside trim locked, deadlocking latch bolt operated by key outside. • Inside button must be turned to unlock outside trim. • Dead bolt operated by key outside or turn inside. • Dead bolt and latch bolt retracted simultaneously by trim inside. • Closing door does not release turn button inside.

Lock options

Strikes



No lip, deadbolt strike



T strike - 5101



Full lip - 5201 (square corner)
or 5202 (radius corner)

DHW_1684_BR_EN CEI 0225
Subject to change without notice

dormakaba USA Inc.
6161 E. 75th Street
Indianapolis, IN 46250
1-800-523-8483
dormakaba.us

