


Installation Template for EXG, EXBV and EXZ Exit Hardware Trim for Use with Von Duprin 98/99 Series Exit Devices

Template Number: G07
Series: EXG, EXBV, EXZ
Backset: Use the Von Duprin 98/99 Series Lock Installation Instructions for backset dimensions.
Trim Style: All Trims
Door Thickness: 1-3/4" [44.4mm] to 2-1/4" [57.1mm]
***Template scale is 100%**



Mark and Drill Holes

1 Determine the inside and outside of the door.

NOTE: Use this side of this template for a LHRB door. For RHRB doors, use the other side of this template. For metal doors, see the **G09 Template—Installation Specifications for EXG, EXBV and EXZ Exit Hardware Trim for use with Von Duprin 98/99 Series Exit Devices.**

2 Cut this template along the bottom dashed line.

3 For new construction installations:

- a If not already done, mark the horizontal and vertical centerlines of the exit device lock on the outside of the door. These centerlines must directly correspond to the inside centerlines. **See the installation instructions provided by Von Duprin for installing the exit device.**
- b Place this template on the outside of the door, aligning the arrows to the marked centerlines.

For retrofitting to existing exit device installations:

- a Place this template on the outside of the door, aligning the holes labeled, 'Escutcheon mounting holes' to the already drilled holes. **See the installation instructions provided by Von Duprin for more information.**
- 4 Tape this template to the door and center punch the drill points.
- 5 Drill the holes. See the **BEST Installation Instructions for Electronic Stand-Alone Exit Hardware Trim (T61828).**

NOTE: To ensure accurate door preparation, use only factory-printed templates. Do not use copies or facsimiles.

Battery bracket hole – 7/16" [11.1mm] dia.
Drill through the door.

Battery bracket/harness hole – 7/8" [22.2mm] dia.
Drill through the door.

Escutcheon mounting holes – 7/16" [11.1mm] dia.
These holes align to the **Von Duprin lock stile case 'A' holes**. Drill both holes through the door.

Horizontal centerline of cylinder

Align with the horizontal centerline of the exit device drawn on the door.

OPTIONAL outside cylinder hole – 2" [50.8mm] dia.

Drill only for devices with outside cylinders. For rim and vertical rod keyed exit devices, drill this hole through the door.

Lift finger slot – 3/4" [19mm]
This slot aligns to the **Von Duprin lock stile case 'C' hole**. Drill through the door.

Escutcheon mounting holes – 7/16" [11.1mm] dia.
These holes align to the **Von Duprin lock stile case 'A' holes**. Drill both holes through the door.

Outside escutcheon outline
For reference only.

Cut the template along this line.

Align with the vertical centerline of the exit device lock drawn on the door.

1/4" [6.3mm]



For Online Instructions Visit:
<https://dhwsupport.dormakaba.com/hc/en-us>
 For Assistance or Warranty Information:
 Call 1-800-392-5209



Para obtener instrucciones línea, visite:
<https://dhwsupport.dormakaba.com/hc/en-us>
 Para obtener asistencia o información de la garantía:
 Llame al 1-800-392-5209




Pour obtenir des directives en ligne, consultez le site:
<https://dhwsupport.dormakaba.com/hc/en-us>
 Pour obtenir de l'aide ou des renseignements sur la garantie:
 Appelez au 1-800-392-5209 ou consultez le site

Warning: This Manufacturer advises that no lock can provide complete security by itself. This lock may be defeated by forcible or technical means, or evaded by entry elsewhere on the property. No lock can substitute for caution, awareness of your environment, and common sense. Builder's hardware is available in multiple performance grades to suit the application. In order to enhance security and reduce risk, you should consult a qualified locksmith or other security professional.

Advertencia: Este fabricante ha de saber que no hay cerraduras que puedan proporcionar seguridad completa por sí misma. Esta cerradura puede fallar forzandola o utilizando medios técnicos o entrando por otra parte del edificio. No hay cerraduras que puedan sustituir precaución, estar al tanto de su entorno y sentido común. Este fabricante también ofrece cerraduras de diferentes grados y rendimientos para ajustarse a su aplicación. Para mejorar la seguridad y reducir riesgos, usted debe consultar con un cerrajero especializado u otro profesional de seguridad.

Advertissement: Le fabricant tient à vous aviser qu'aucun verrou ne peut à lui seul offrir une sécurité complète. Ce verrou peut être mis hors d'état par la force ou des moyens techniques ou être évité par l'utilisation d'une autre entrée sur la propriété. Aucun verrou ne peut remplacer la surveillance de votre environnement et le bon sens. La quincaillerie pour le constructeur est offerte selon différents grades de performance pour différentes applications. Afin d'augmenter la sécurité et de réduire le risque, vous devriez consulter un serrurier qualifié ou un autre professionnel de la sécurité.

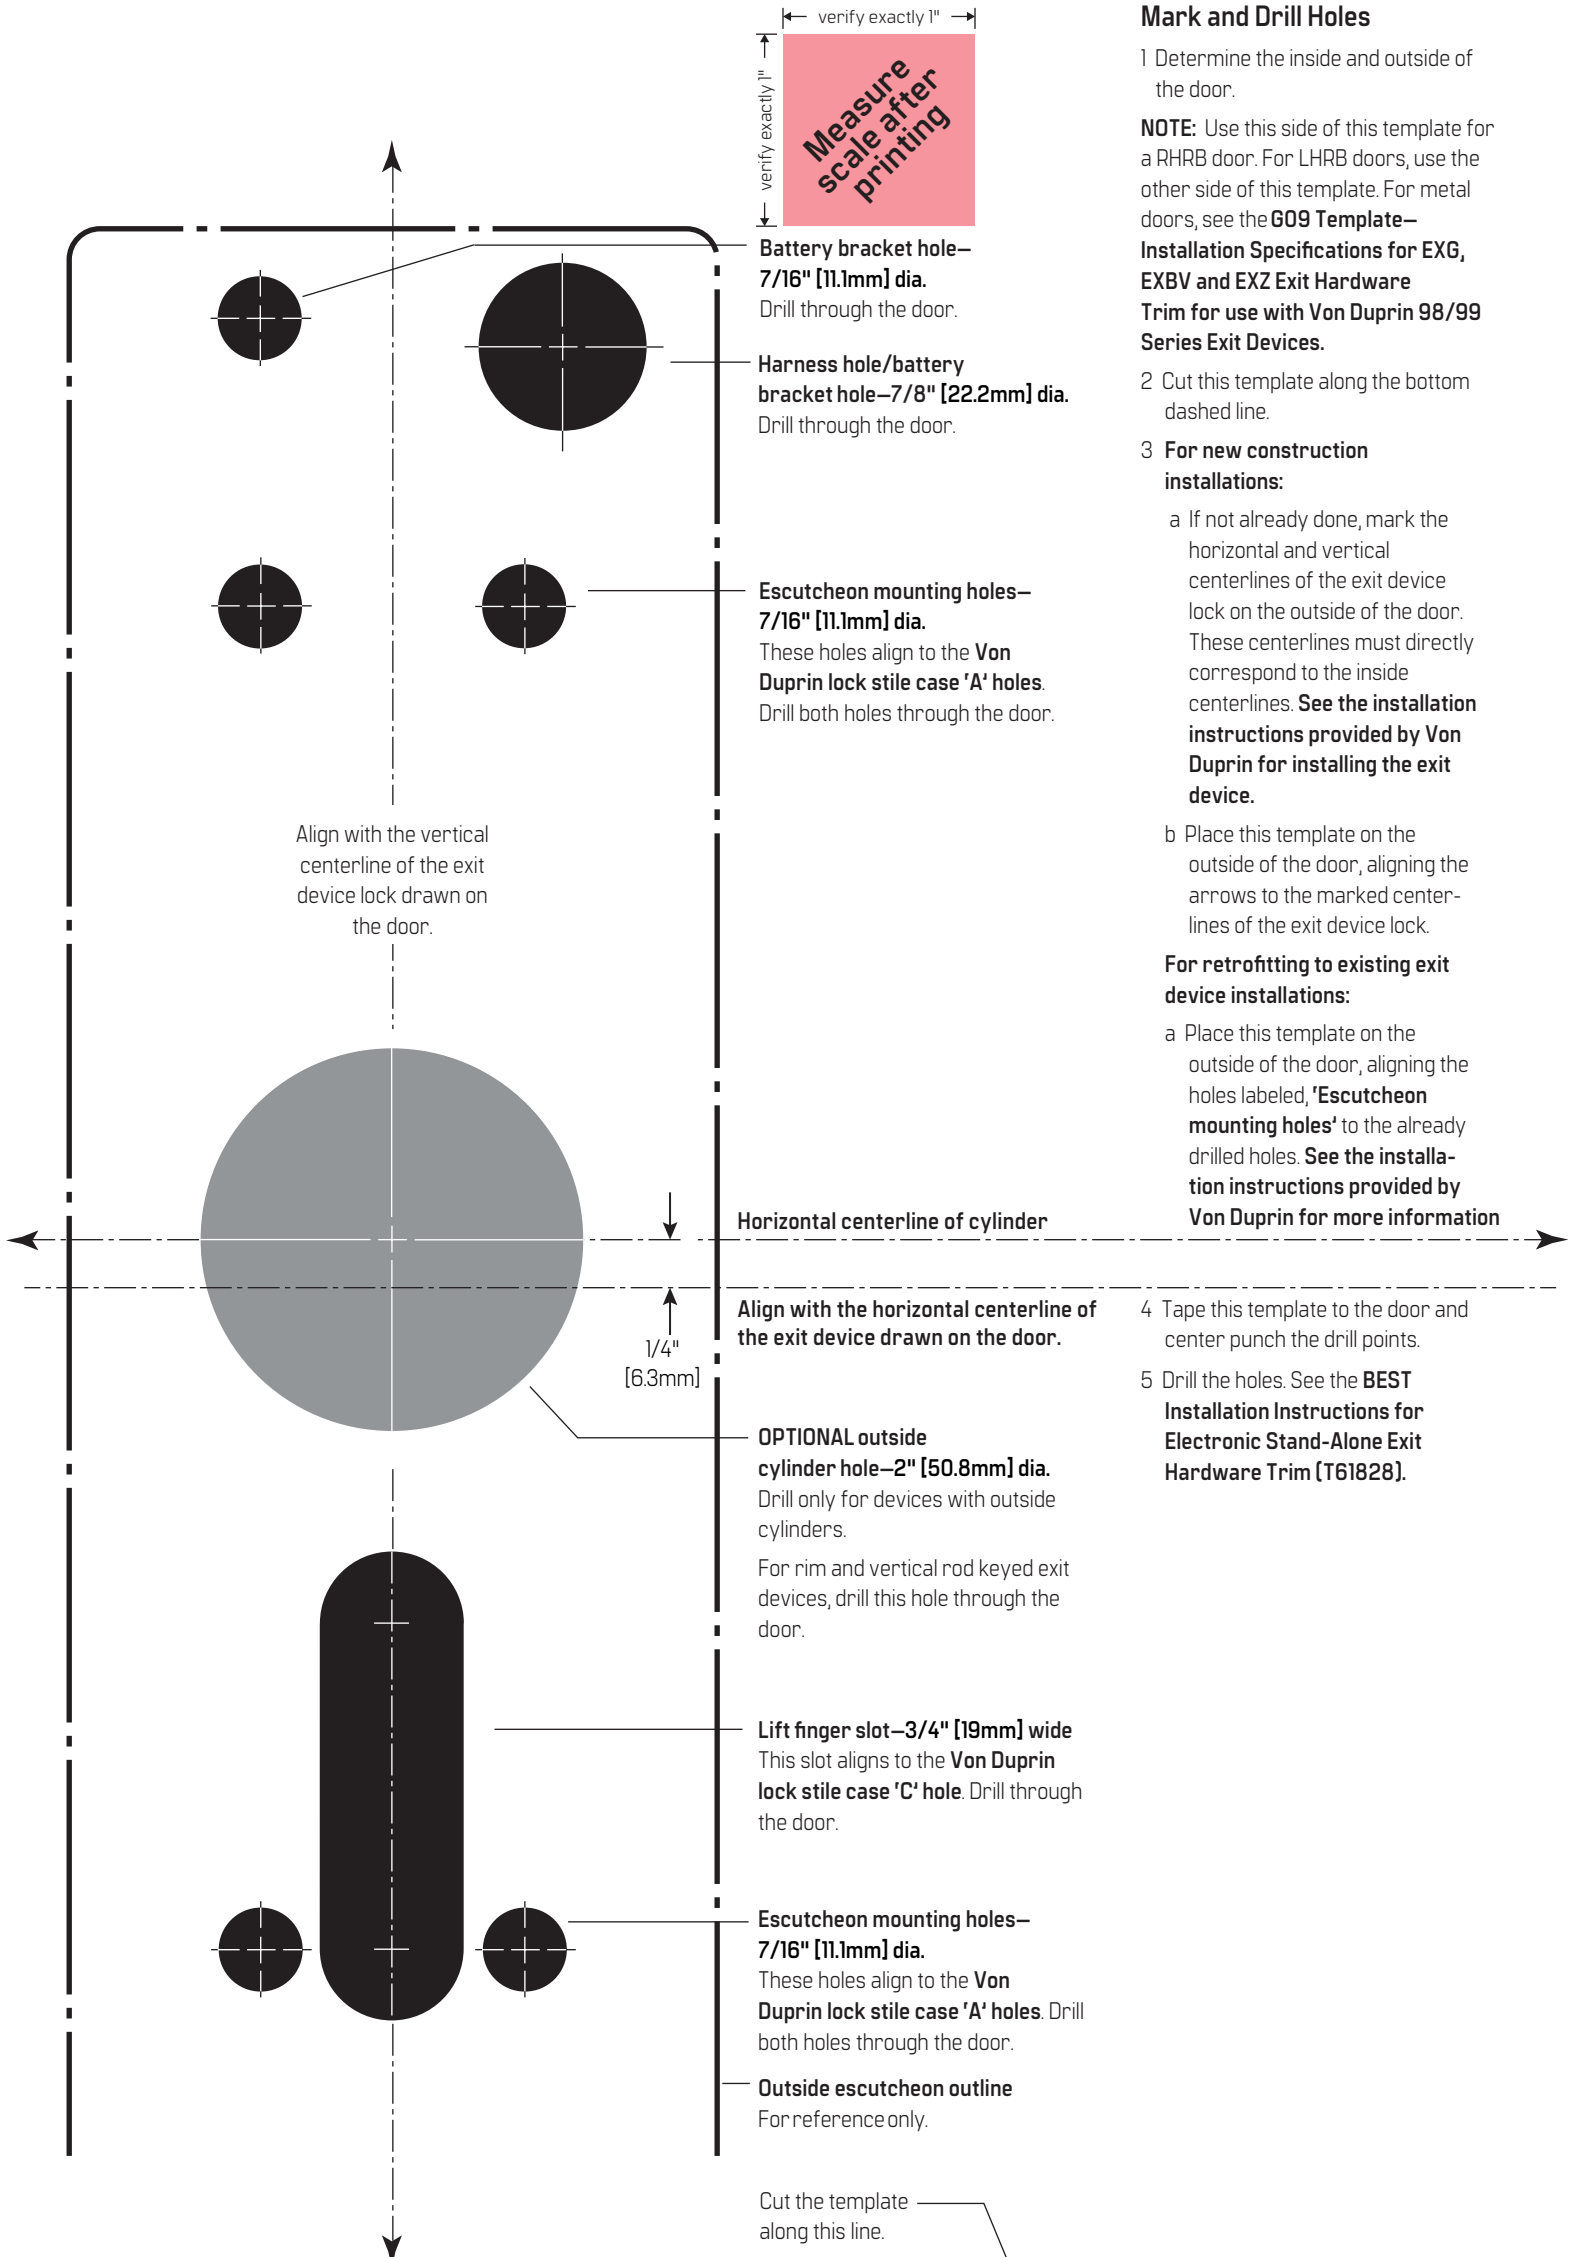

Mark and Drill Holes

1 Determine the inside and outside of the door.

NOTE: Use this side of this template for a RHRB door. For LHRB doors, use the other side of this template. For metal doors, see the **G09 Template—Installation Specifications for EXG, EXBV and EXZ Exit Hardware Trim for use with Von Duprin 98/99 Series Exit Devices.**

2 Cut this template along the bottom dashed line.

3 **For new construction installations:**

- a If not already done, mark the horizontal and vertical centerlines of the exit device lock on the outside of the door. These centerlines must directly correspond to the inside centerlines. **See the installation instructions provided by Von Duprin for installing the exit device.**
- b Place this template on the outside of the door, aligning the arrows to the marked centerlines of the exit device lock.

For retrofitting to existing exit device installations:

- a Place this template on the outside of the door, aligning the holes labeled, **'Escutcheon mounting holes'** to the already drilled holes. **See the installation instructions provided by Von Duprin for more information**

4 Tape this template to the door and center punch the drill points.

5 Drill the holes. See the **BEST Installation Instructions for Electronic Stand-Alone Exit Hardware Trim (T61828).**