


# Installation Specifications: Series 2600, 2600LBR, FL2600, FL2600LBR Trim Series: Exit Only, Cyl. Only, 2901, 2902, 2903

For online instructions, assistance or warranty information:  
Call 1-800-392-5209 or visit <https://dhwsupport.dormakaba.com/hc/en-us>



REINFORCEMENT REQUIREMENTS
PROVIDE ADEQUATE REINFORCEMENT TO METAL COVERED COMPOSITE AND HOLLOW METAL DOORS FOR THE DRILLING AND TAPPING FOR THE MACHINE SCREWS.
SEX NUTS AND BOLTS
SEX BOLTS ARE REQUIRED FOR PLASTIC, WOOD, METAL COVERED COMPOSITE AND HOLLOW METAL DOORS WITHOUT REINFORCEMENT

**SEX BOLT MACHINING**  
DRILL 1/4 DIA. INSIDE  
DRILL 3/8 DIA. OUTSIDE

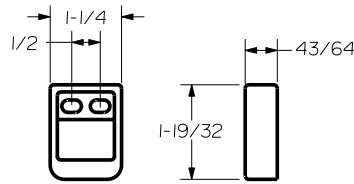

**S59 TOP STRIKE**  
(SURFACE APPLIED)

PREPARE THESE HOLES AT DEVICE INSTALLATION

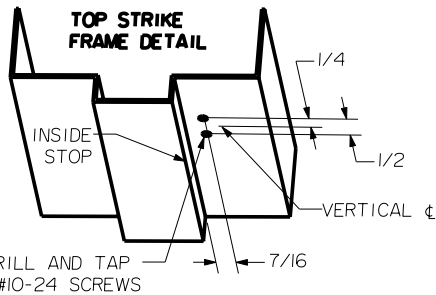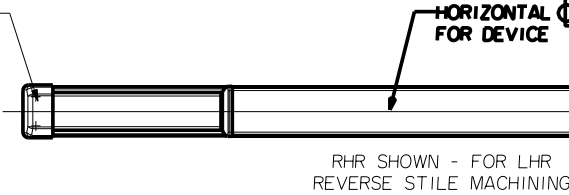


NOTE: "LETTER" AT END OF TRIM MODEL NO. DESIGNATES LEVER STYLE. EXCEPT AS NOTED, LEVER STYLE HAS NO EFFECT ON STILE MACHINING.

**LBR DEVICES:**  
OPENING TO GO 8" BELOW HORIZONTAL CL OF DEVICE



1-11/16 BACKSET 3 STILE MIN.

39-15/16 FINISHED FLOOR

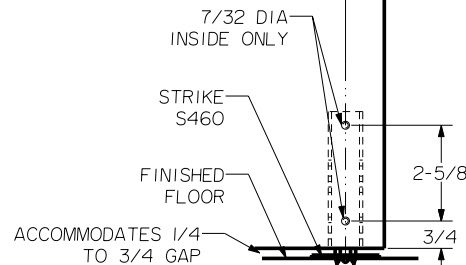

**LBR DEVICES:**  
OMIT BOTTOM BOLT MACHINING.  
FIRE BOLT REQ'D FOR FL DEVICES  
SEE DRAWING O297-II-000 FOR DETAILS

HOLE (2) PLS A	DEVICES	TRIMS	HOLE B	HOLE B1	SLOT D
#10-24 TAP INSIDE ONLY	260I,FL260I	EXIT ONLY	NO	NO	NO
	2603,FL2603	CYL ONLY	1-3/16 DIA. OUTSIDE		3/4 SLOT INSIDE
1/4 DIA INSIDE 13/32 DIA OUTSIDE	260I,FL260I	290I	NO	NO	NO
	2602,FL2602	2902	NO		
	2603,FL2603	2903	1-7/16 DIA OUTSIDE	YES	

