




# Series: 2400 Rim Device – Trim Series: 2908, 2914 – Strike: S988 – Aluminum Door Preparation

For online instructions, assistance or warranty information:  
Call 1-800-392-5209 or visit <https://dhwsupport.dormakaba.com/hc/en-us>


### Sex bolt machining

Drill 1/4" [6.35] dia. inside  
Drill 3/8" [9.53] dia. outside

**NOTE: "LETTER" at end of trim model number designates lever style. Except as noted, lever style has no effect on stile machining.**

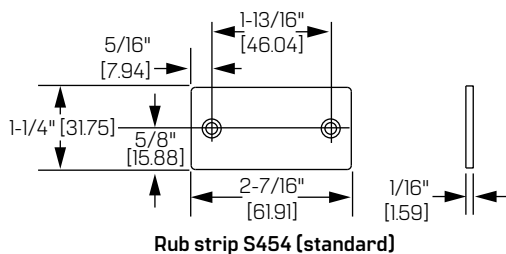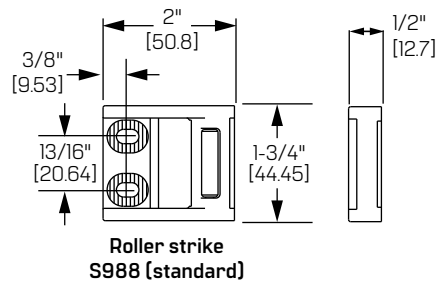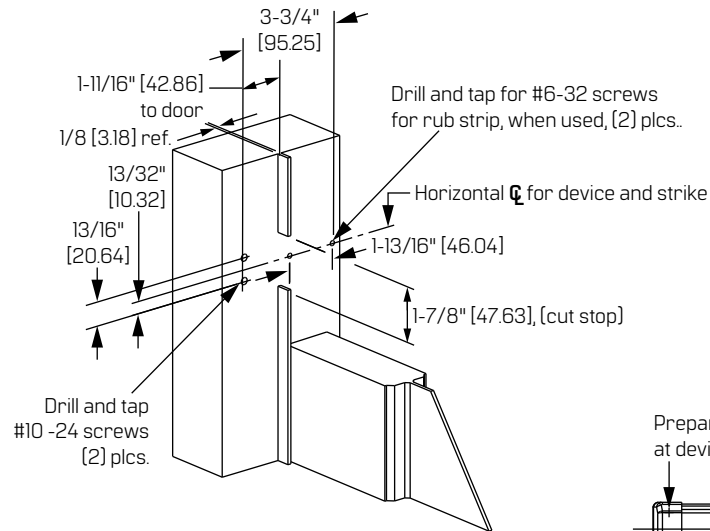

Devices	Trims	A-hole [2] plcs.	B-hole	C-hole
2408	2908	1/4" [6.35] dia. inside	Yes	5/8" [15.88] dia. inside
2414	2914	13/32" [10.32] dia. outside	Not req'd	1-3/8" [34.93] dia. outside

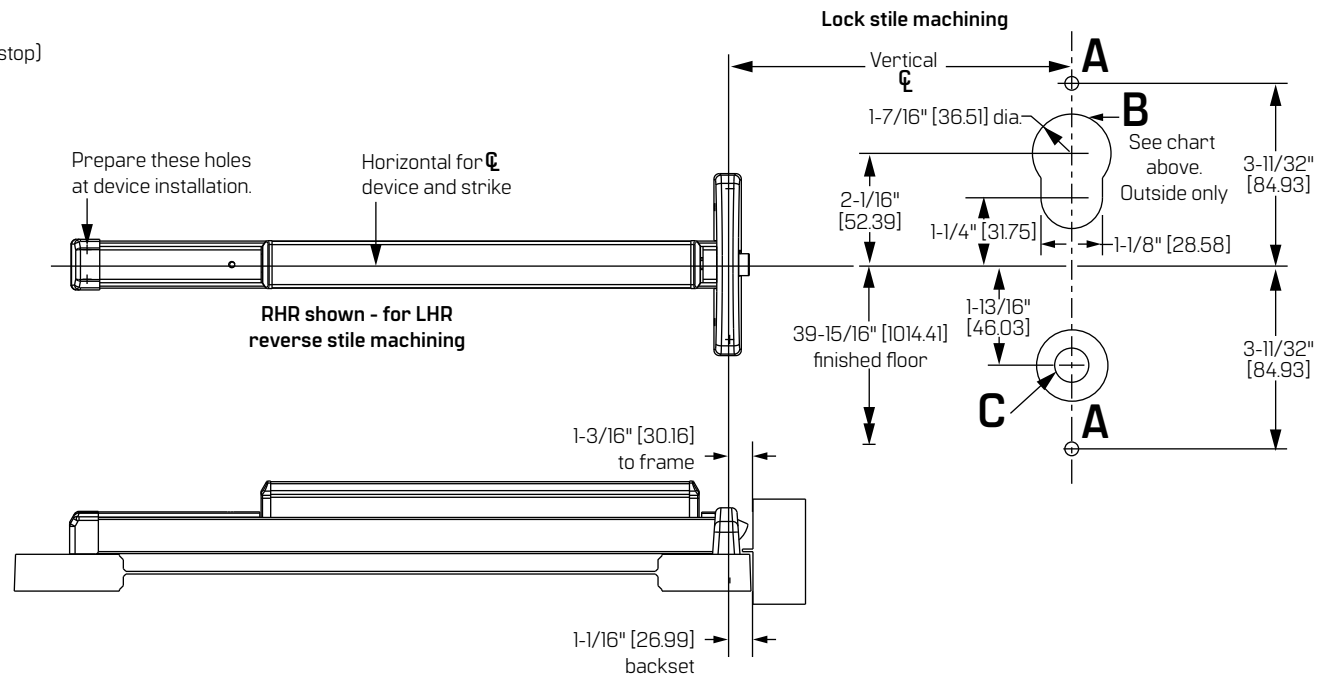

Aluminum door and frame with blade or applied stop		
Min. stile	Device size	Door width
1-3/4" [44.45]	3' - 0" [0.9144 m]	2' - 6" [0.762 m] to 3' - 0" [0.9144 m]
	4' - 0" [1.2192 m]	3' - 1" [0.9398 m] to 4' - 0" [1.2192 m]