



Door Position Switch with Alarm Kit Installation Instructions

NOTE: Recommended gap between magnet and door position switch in installed position is 1/16" [1.59] - 1/8" [3.18]. Please consider distance between exit device end cap and frame. Depending on your application, strike and template used, switch and magnet can be adjusted and may extend from device and/or frame.

Please consult factory for installation consideration.

Function:

The DS880/NDS986 door position switch will trigger an exit alarm (not shown) using WH-495 wire harness.

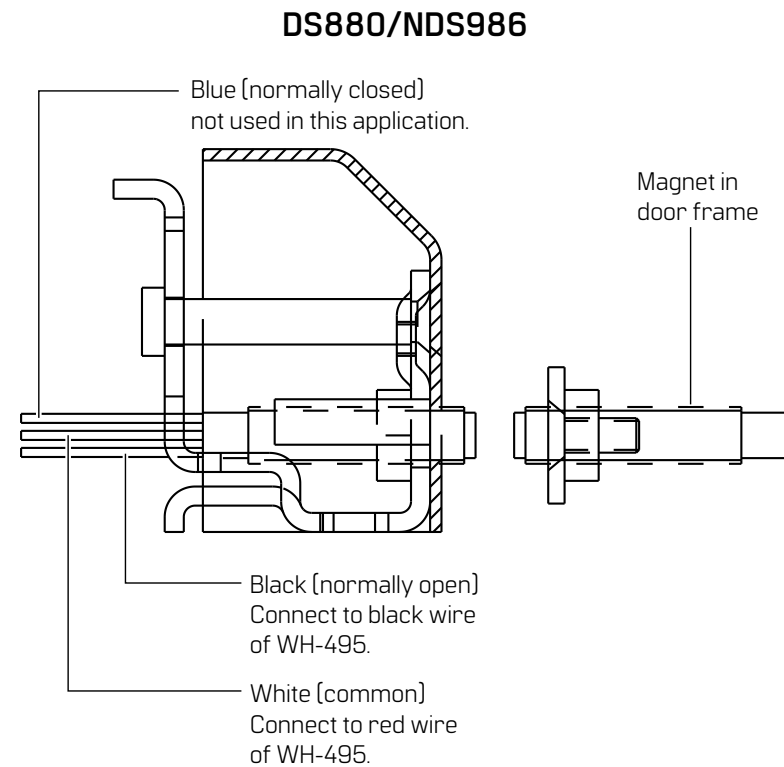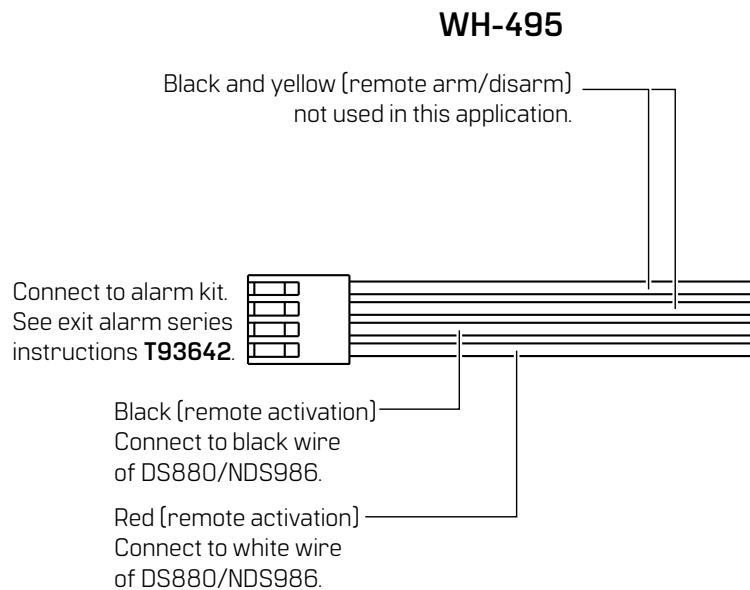

Document translations available.
Scan for product details and downloads.
Call 1-800-392-5209 or visit
<https://dhwsupport.dormakaba.com/hc/en-us>
for assistance and warranty information.

⚠ WARNING! This Manufacturer advises that no lock can provide complete security by itself. This lock may be defeated by forcible or technical means, or evaded by entry elsewhere on the property. No lock can substitute for caution, awareness of your environment, and common sense. Builder's hardware is available in multiple performance grades to suit the application. In order to enhance security and reduce risk, you should consult a qualified locksmith or other security professional.