


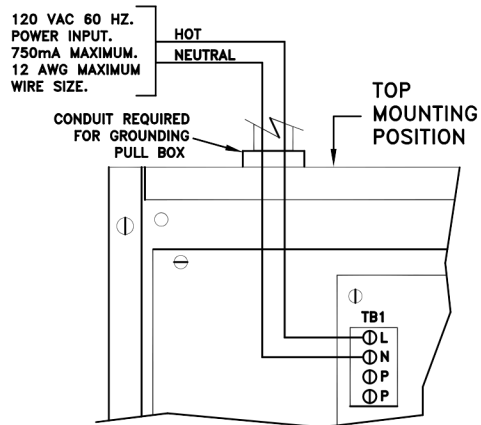


GENERAL WIRING DIAGRAM FOR 8Q00312 ELECTRIC LATCH RETRACTION CONTROLLER

dormakaba

CLASS 2 OUTPUTS

For use with Power Supply Latch
Installation Instructions 42859

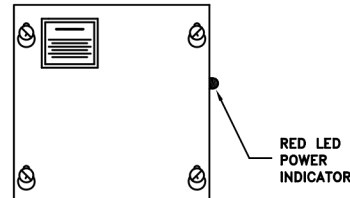

SECURITY
UL
LISTED
EQUIPMENT
4M73

UL
LISTED
GENERAL SIGNALING
EQUIPMENT
4M73

MFG. DATE:

CONTROLLER INTENDED
FOR INDOOR USE ONLY.



USED FOR ADJUSTING UNLOCK DELAY TIME WHEN
USING MOMENTARY ACTION SWITCHES FOR SW. 1 AND
SW. 2. R2 ADJUSTS DEV. 1 (SINGLE DOOR) OR DEV.
1 & DEV. 2 (PAIR DOORS) TIME DELAY. R4 ADJUSTS
DEV. 2 (SINGLE DOOR) TIME DELAY. 20 SEC. MAX.
DELAY TIME.

