


669HDLL - ALUMINUM GEARED HINGE, 3/32" INSET, FULL CONCEALED



- NOTES:**
1. HINGES CUT TO CUSTOM LENGTH ARE CUT FROM THE BOTTOM. PLEASE SPECIFY HANDING.
 2. ALL DIMENSIONS ARE IN INCHES.
 3. ALL DIMENSIONS ARE TO CENTERLINE OF HOLES.
 4. * = DENOTES EXTRA MOUNTING HOLE FOR THE LEAD-LINE MODEL.

| STANDARD HINGE SIZES & SCREW DETAIL | | | | | | | | | | | |
|-------------------------------------|--|------|----|------|----|------|----|------|----|-------|----|
| NOMINAL DOOR HEIGHT | | 6'8" | | 7'0" | | 7'2" | | 8'0" | | 10'0" | |
| ACTUAL HINGE LENGTH | | 79" | | 83" | | 85" | | 95" | | 120" | |
| | | HD | LL | HD | LL | HD | LL | HD | LL | HD | LL |
| FRAME | 12-24 x 7/8" PHILLIPS FLAT HEAD, UNDERCUT, SELF DRILLING, THREAD FORMING TEK MACHINE SCREW | 19 | 26 | 19 | 26 | 19 | 26 | 21 | 30 | 23 | 34 |
| DOOR | 12-24 X 7/8" PH. F.H. UNDERCUT SELF DRILLING THREAD FORMING TEK SCREW | 19 | 26 | 19 | 26 | 19 | 26 | 21 | 30 | 23 | 34 |

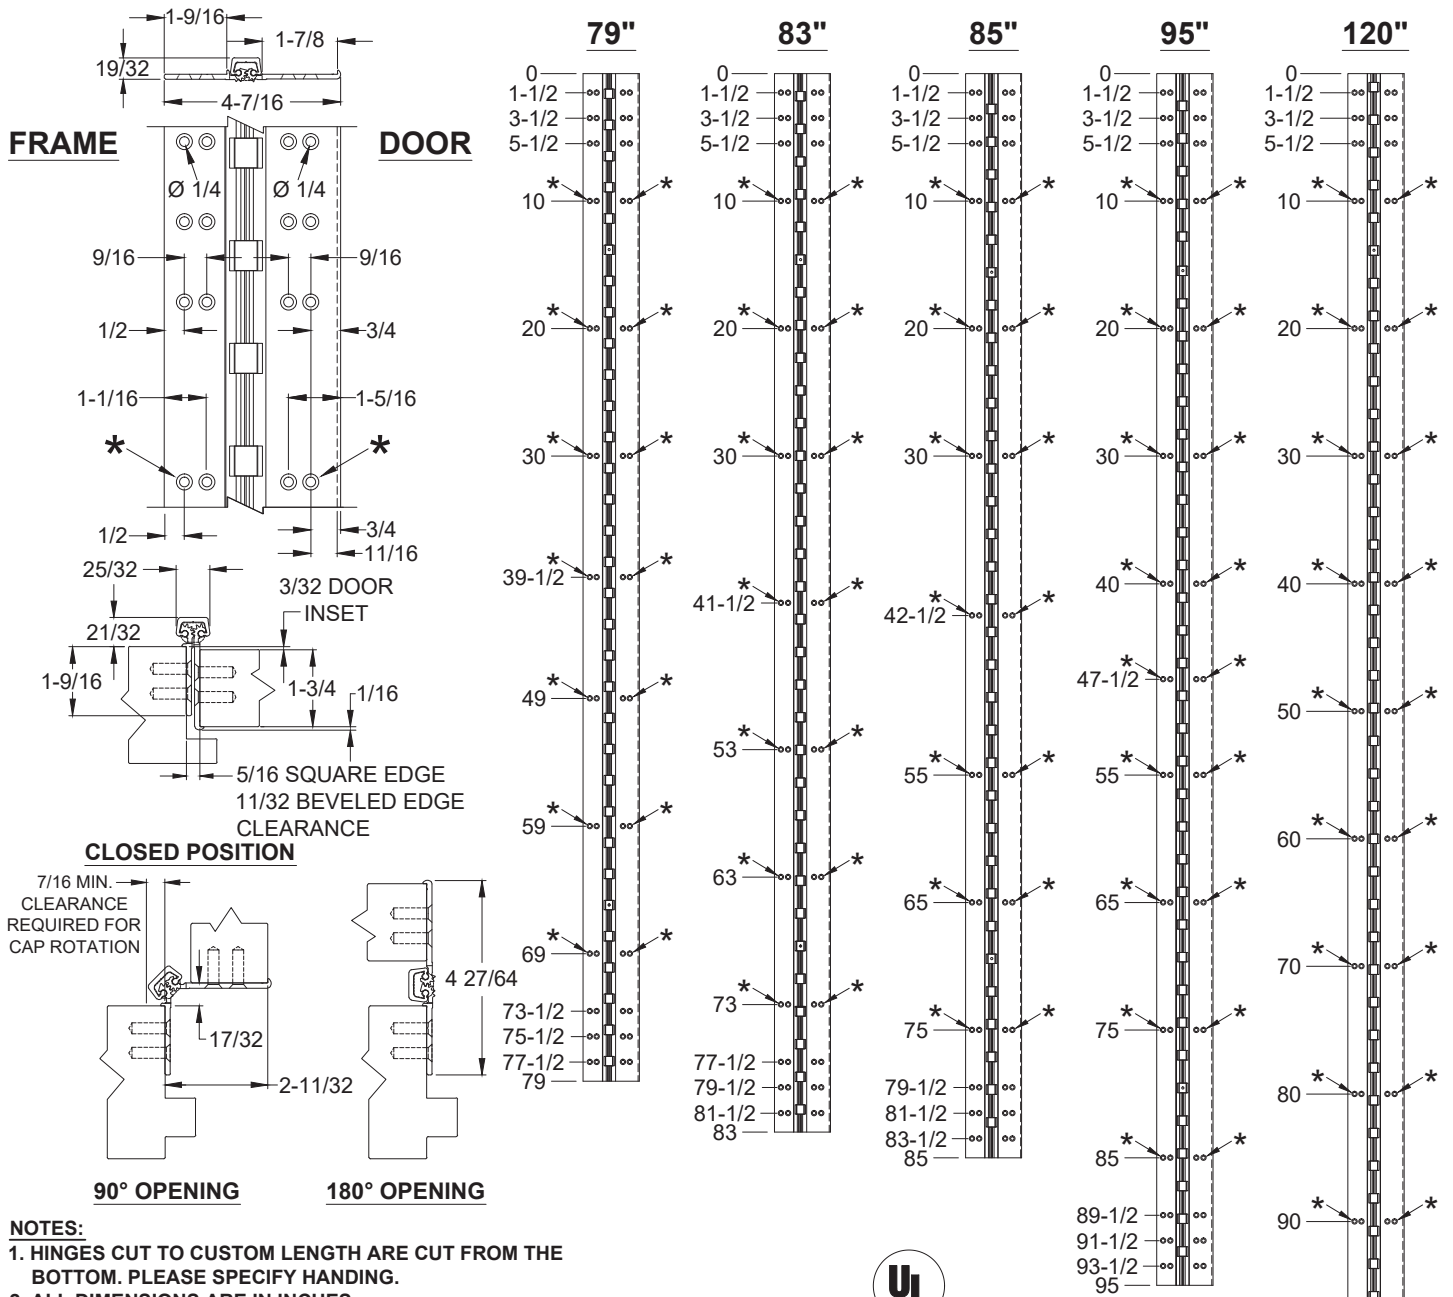