


Door & Frame Preparation for 63K, 73KC, 83K, & 93K Cylindrical Locks

Template Number: K
Series: 1 Z
Backset:
Strike: Large ANSI strike [Sgl]
Door Thickness: 1 3/4"

Notes

- 1 Allow plus tolerance for clearance per ANSI A115.2.
- 2 Lock and latch case support by door manufacturer.
- 3 Plaster guard by door manufacturer.
- 4 Prepare for a #8-32 screw.

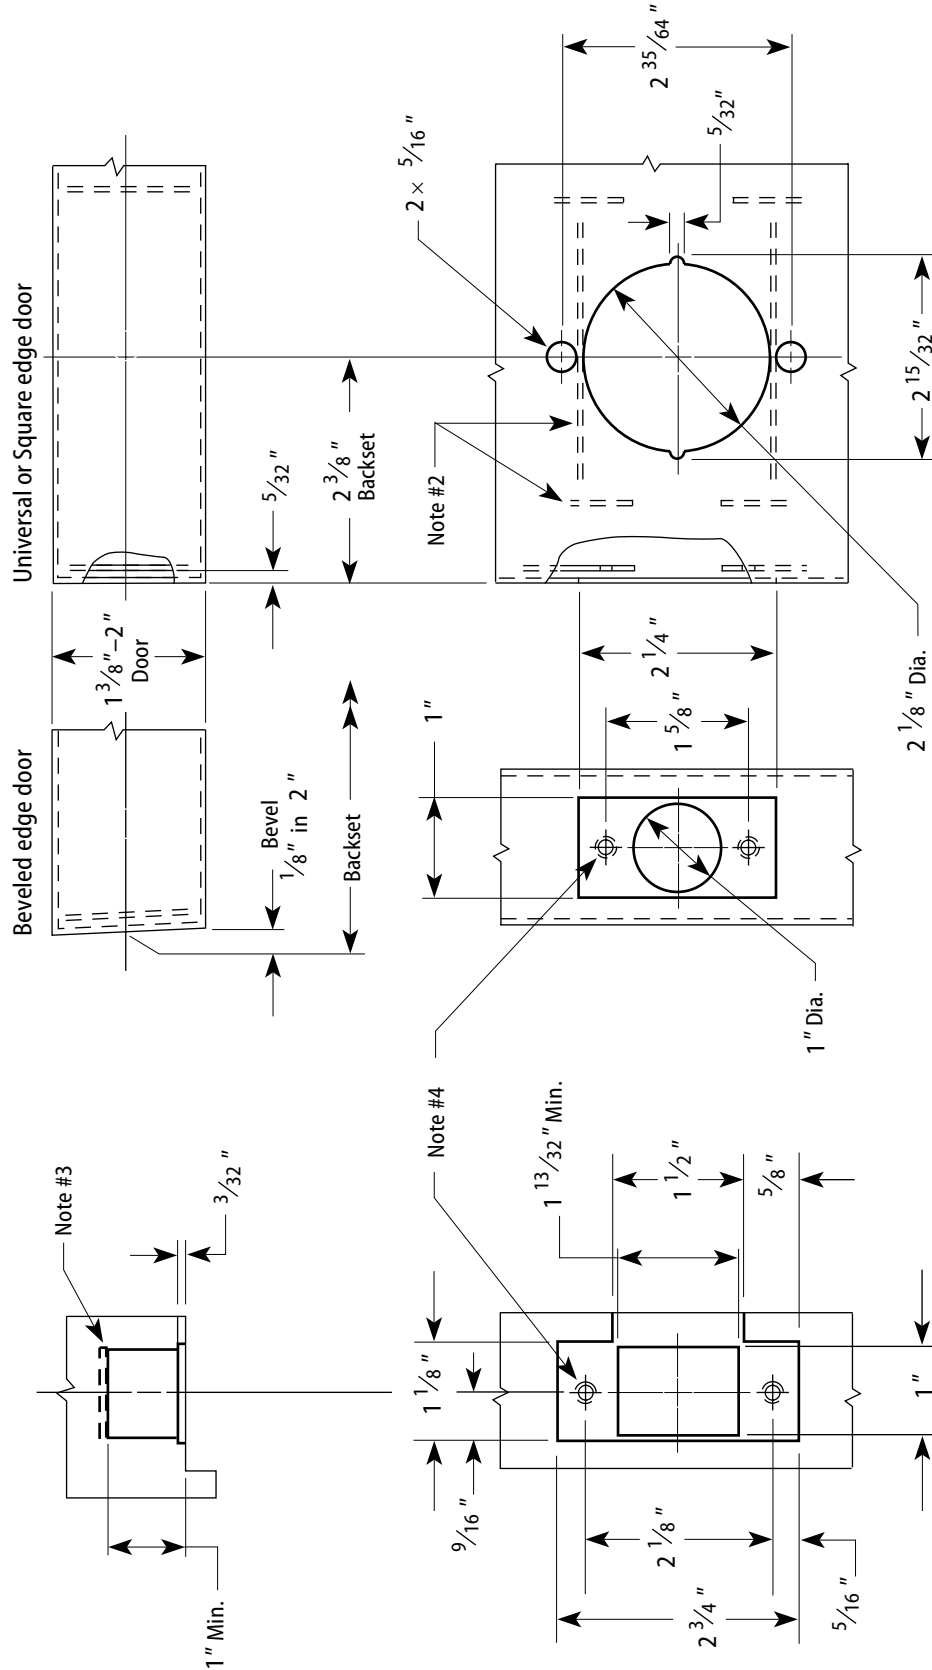

2 3/8" Backset Door Preparation

DO NOT SCALE

Frame Preparation