
BEST
dormakaba Group


48H-49H mortise locks

Door Preparation

Template number: H17 **Trim style:** M
Series: 48H-49H **Door thickness:** 1-3/4" [44.45] to 5" [127]

Not to scale. Measurements are for reference only. Not a drilling template.

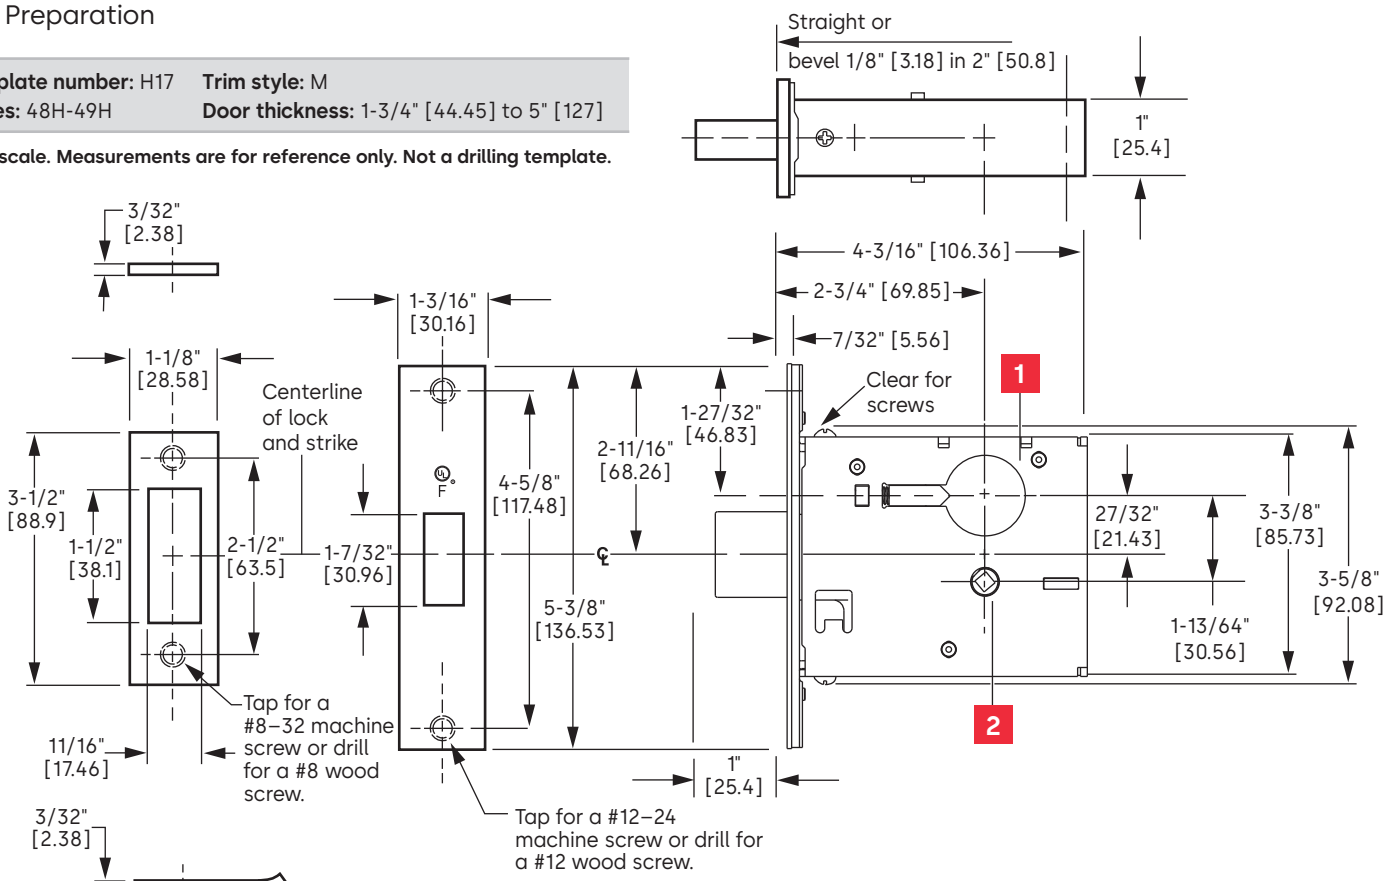

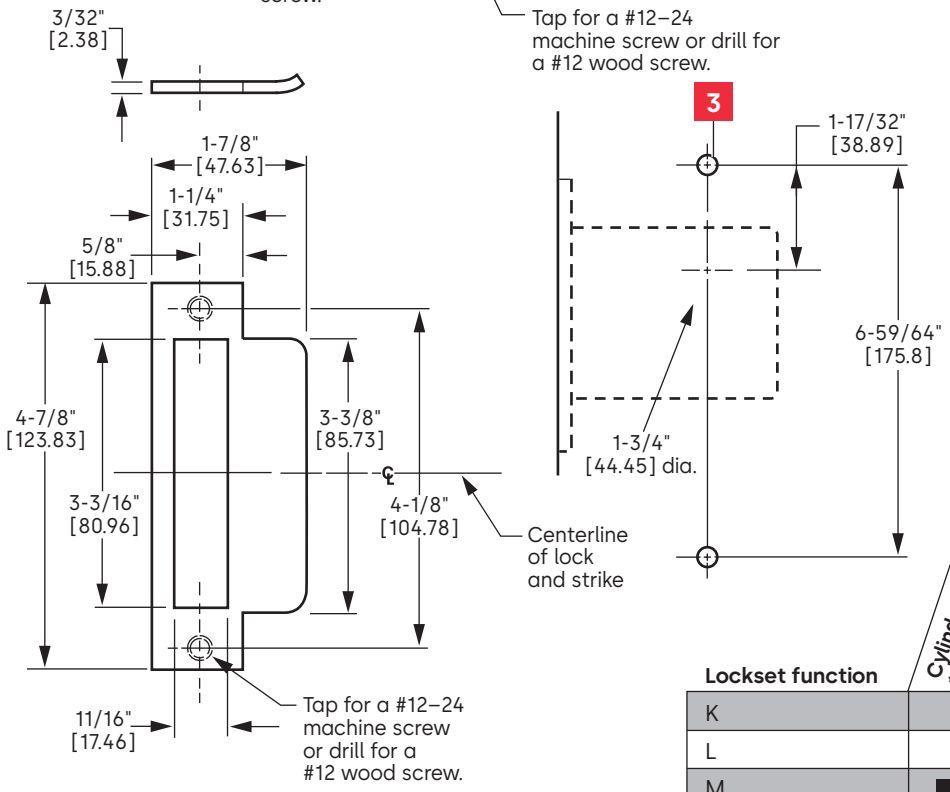

NOTE: A 1-3/4" [44.45] dia. cylinder hole is required for 1E7J4 and 1E7K4 high-security cylinders on 49H when M trim is not used.

NOTE: See template H11 for complete strike and strike box specifications.

Hole pattern chart

Lockset function	Inside 1 Cylinder A 1-1/4" [31.75] dia.	Inside 2 Turn knob 1/2" [12.7] dia.	Outside 1 Cylinder A 1-1/4" [31.75] dia.	Trim 3 49H M trim 9/16" [14.29] dia. (2 holes)
K		■	■	■
L			■	■
M	■		■	■
R	■		■	■

For online instructions, assistance or warranty information:
Call 1-800-392-5209 or visit https://dhwsupport.dormakaba.com/hc/en-us

BEST is a trademark of dormakaba USA Inc. ©2026. All rights reserved.