


6S75

Notes

- 1 All 6S76 gate locks are supplied with two 1E74 cylinders and four spacers.
- 2 After assembling cylinders both cams must operate freely.
- 3 Allow $+1/16$ " tolerance for clearance.

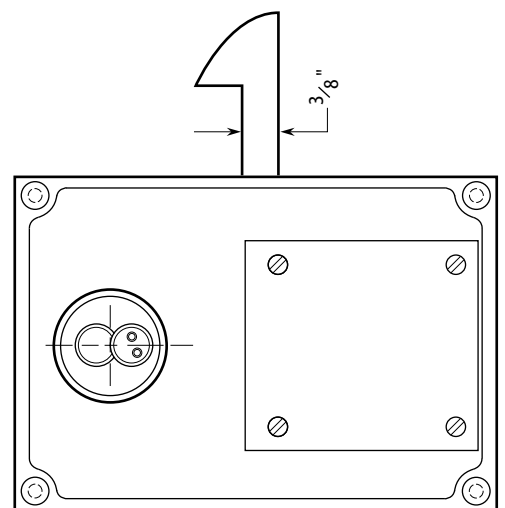

6S76

Title Installation Specifications for 6S75 & 6S76 Gate Lock				BEST ACCESS SYSTEMS		
Series 6S	Backset 1 15/32"	Trim style —	Door thickness —	Rev date 04/2000	Template number S04	Rev A