


# 34H-37H Strikes & Box

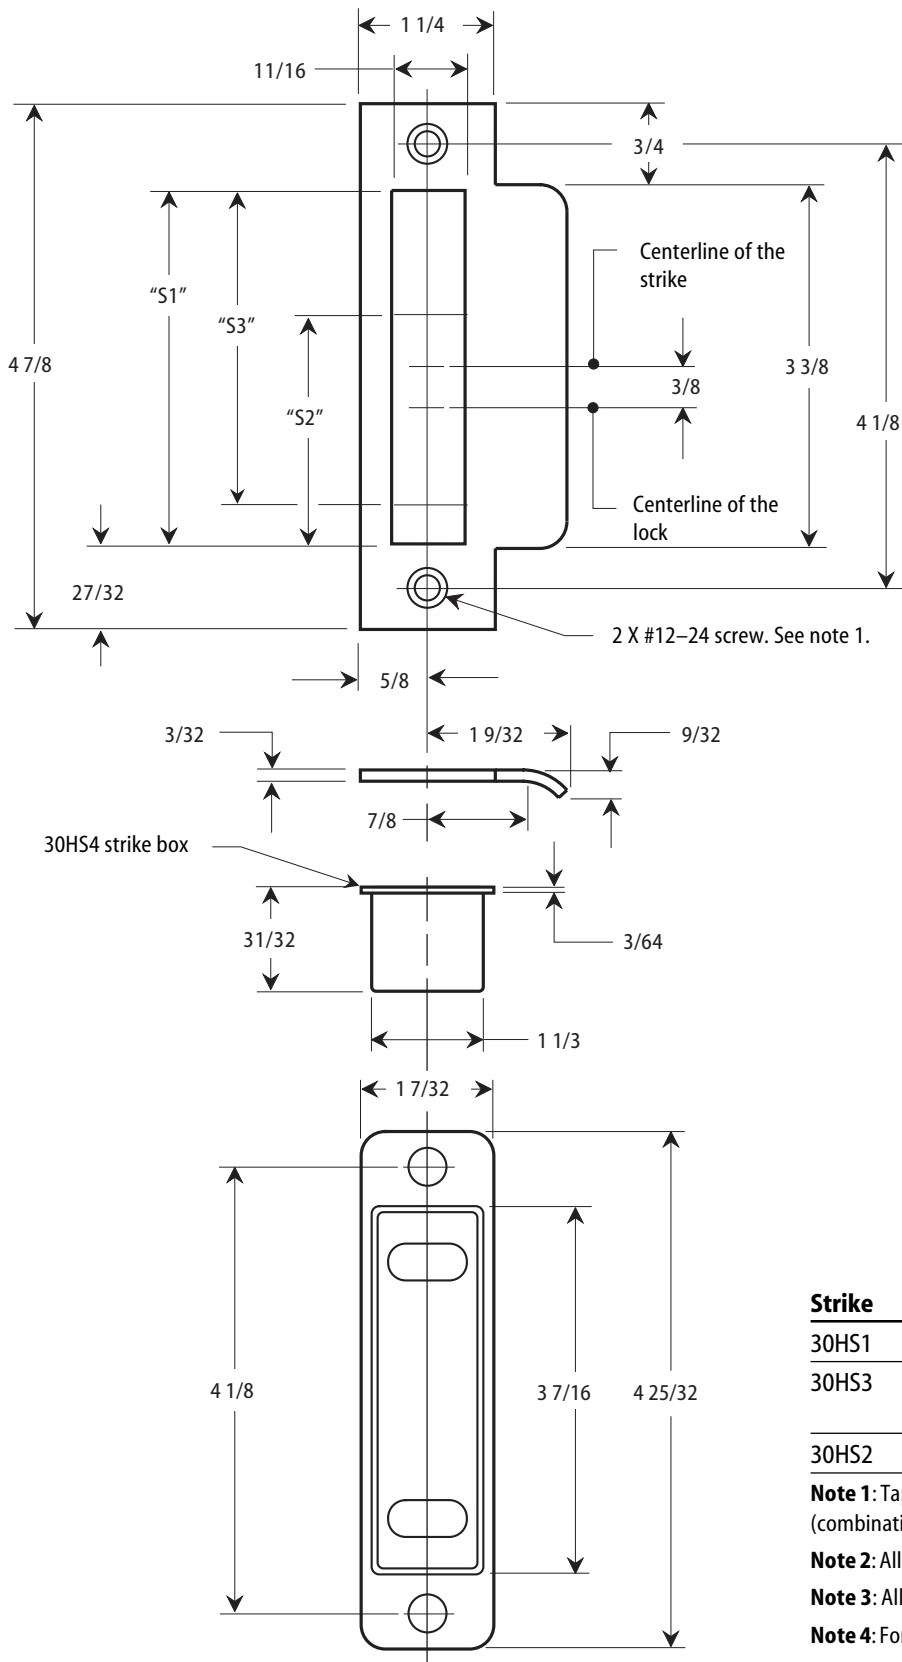

Strike	Dimension	Functions
30HS1	33/16"	A, B, C, F, FW, L, LF, N, P, S, T, W
30HS3	2 13/16"	BW, FD, HF, HJ (specify the hand of door)
30HS2	1 13/16"	E, EW, G, J, WW, Y

**Note 1:** Tap for a #12-24 machine screw or drill for a #12 wood screw (combination screws are supplied).


**Note 2:** Allow plus tolerance (1/64") for clearance per ANSI A115.1.

**Note 3:** All dimensions are in inches.

**Note 4:** For electrified functions (EWEL, EWEU, etc) see Template W27.

Title Strike Specification for 34H-39H Mortise Locks				<b>BEST ACCESS SYSTEMS</b>			
Series 34H-39H	Backset 2 3/4"	Trim style A, B, C, D, H, J, M, N, S	Door thickness	Rev date 10/2003	Template number H11	Rev G	

# 38H-39H Strike & Box

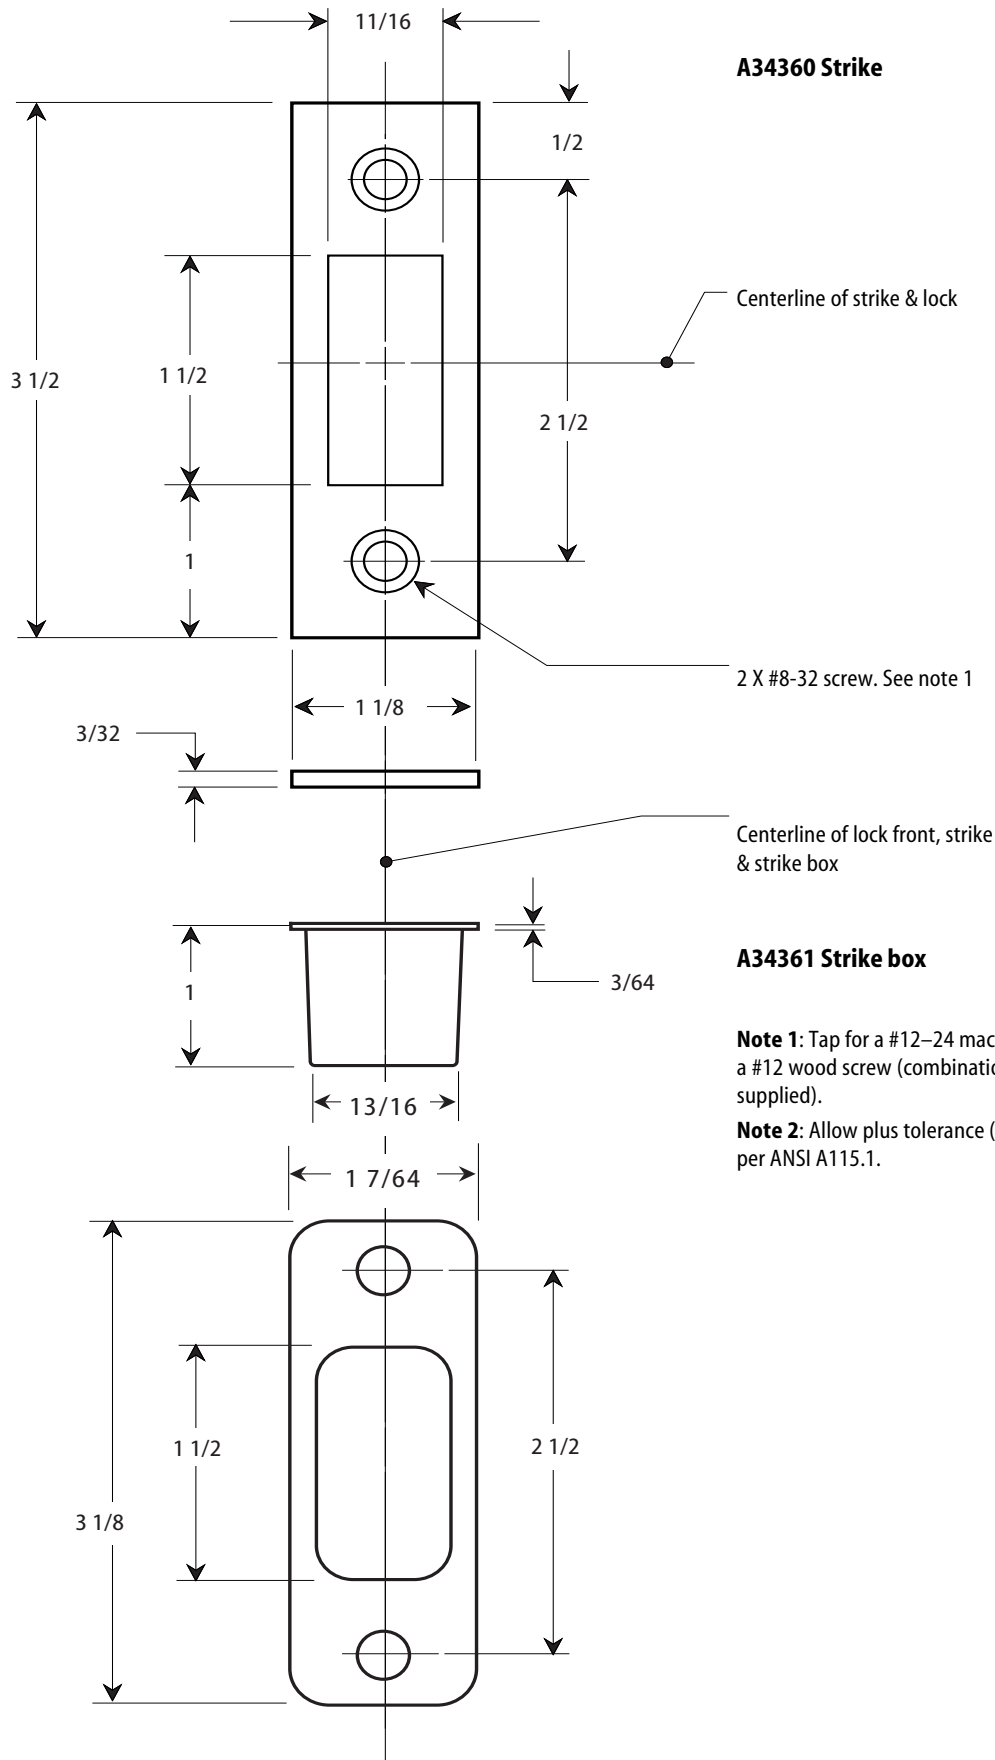

**Note 1:** Tap for a #12-24 machine screw or drill for a #12 wood screw (combination screws are supplied).

**Note 2:** Allow plus tolerance (1/64") for clearance per ANSI A115.1.