


# FULL MORTISE TEMPLATE PIVOT REINFORCED HINGES FOR DOORS WITH BEVELED EDGE HINGE STILES

Size: 5" x 4 1/2"

For use with door holders, closers and operators. See templates T50-07 and T50-11 for types which provide clearance for concealed devices.

## TOP HINGE - RIGHT HAND SHOWN LEFT HAND IS OPPOSITE

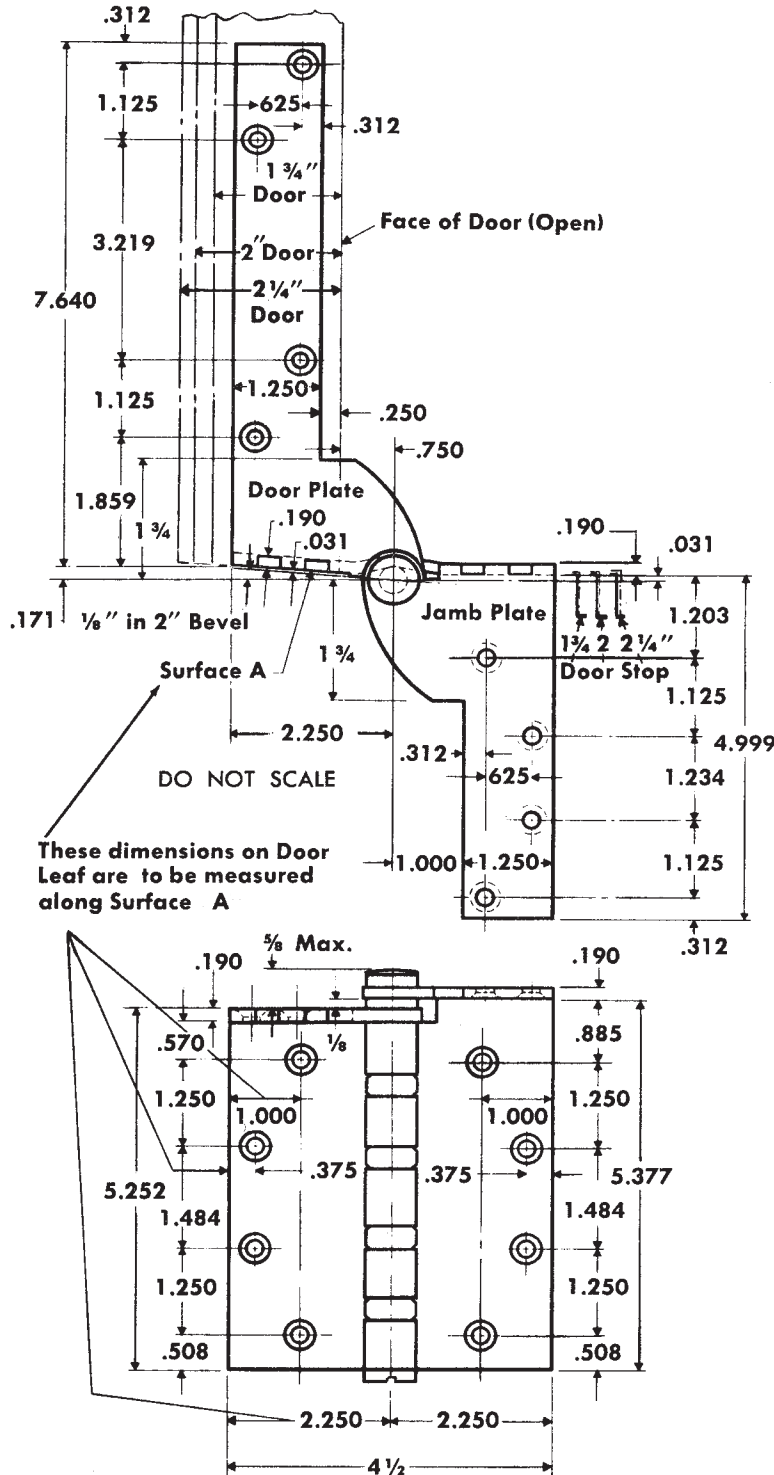

SET CLASS NO.		Gauge of Metal
Steel	Nonferrous	
CB213	CB223	0.190
FBB213	FBB223	0.190
CB1909	CB1969	0.190
CB1909R	CB1969R	0.190

Machine Screw Size — 1/2 x 12-24 F.H.  
Wood Screw Size — 1 1/2 x No. 12 F.H.


NOTE: Backsets which apply when pivot-reinforced hinge is used on door thickness indicated and when the usual 1/16 stop clearance is desired.

Door Thickness	*Backset on Door	*Backset on Frame
1 3/4	1/4	5/16
2	1/2	9/16
2 1/4	3/4	13/16

**\*CAUTION:** These backsets must be used on ALL hinges in set.

## CENTER AND BOTTOM HINGES

Size — 5" x 4 1/2"  
Gauge of Metal — .190

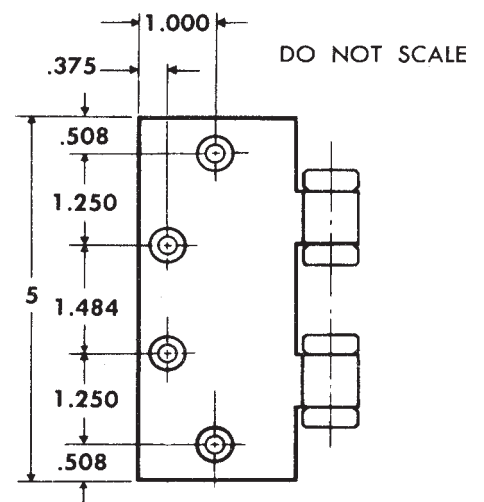

Machine Screw Size — 1/2 x 12-24 F.H.  
Wood Screw Size — 1 1/2 x No. 12 F.H.