


Notes

1. Also see the W16 Template—Installation Template for 83KM/93KM Cylindrical Locks.
2. Allow plus tolerance for clearance per ANSI A115.5. The general tolerance is $\pm 1/64$ ".
3. The lock and latch case support are required from the door manufacturer.
4. The plaster guard is required from the frame manufacturer.
5. Prepare for a #8-32 screw.
6. Prepare for a #12-24 screw.
7. When a strike box is used, $9/64$ ".
8. For backsets other than $2 3/4$ ", position the vertical centerline of the lock appropriately.
9. Drill the 1" hole $1 3/4$ " deep, drill the $3/8$ " hole through the door.
10. Drill the 1" hole 1" deep.

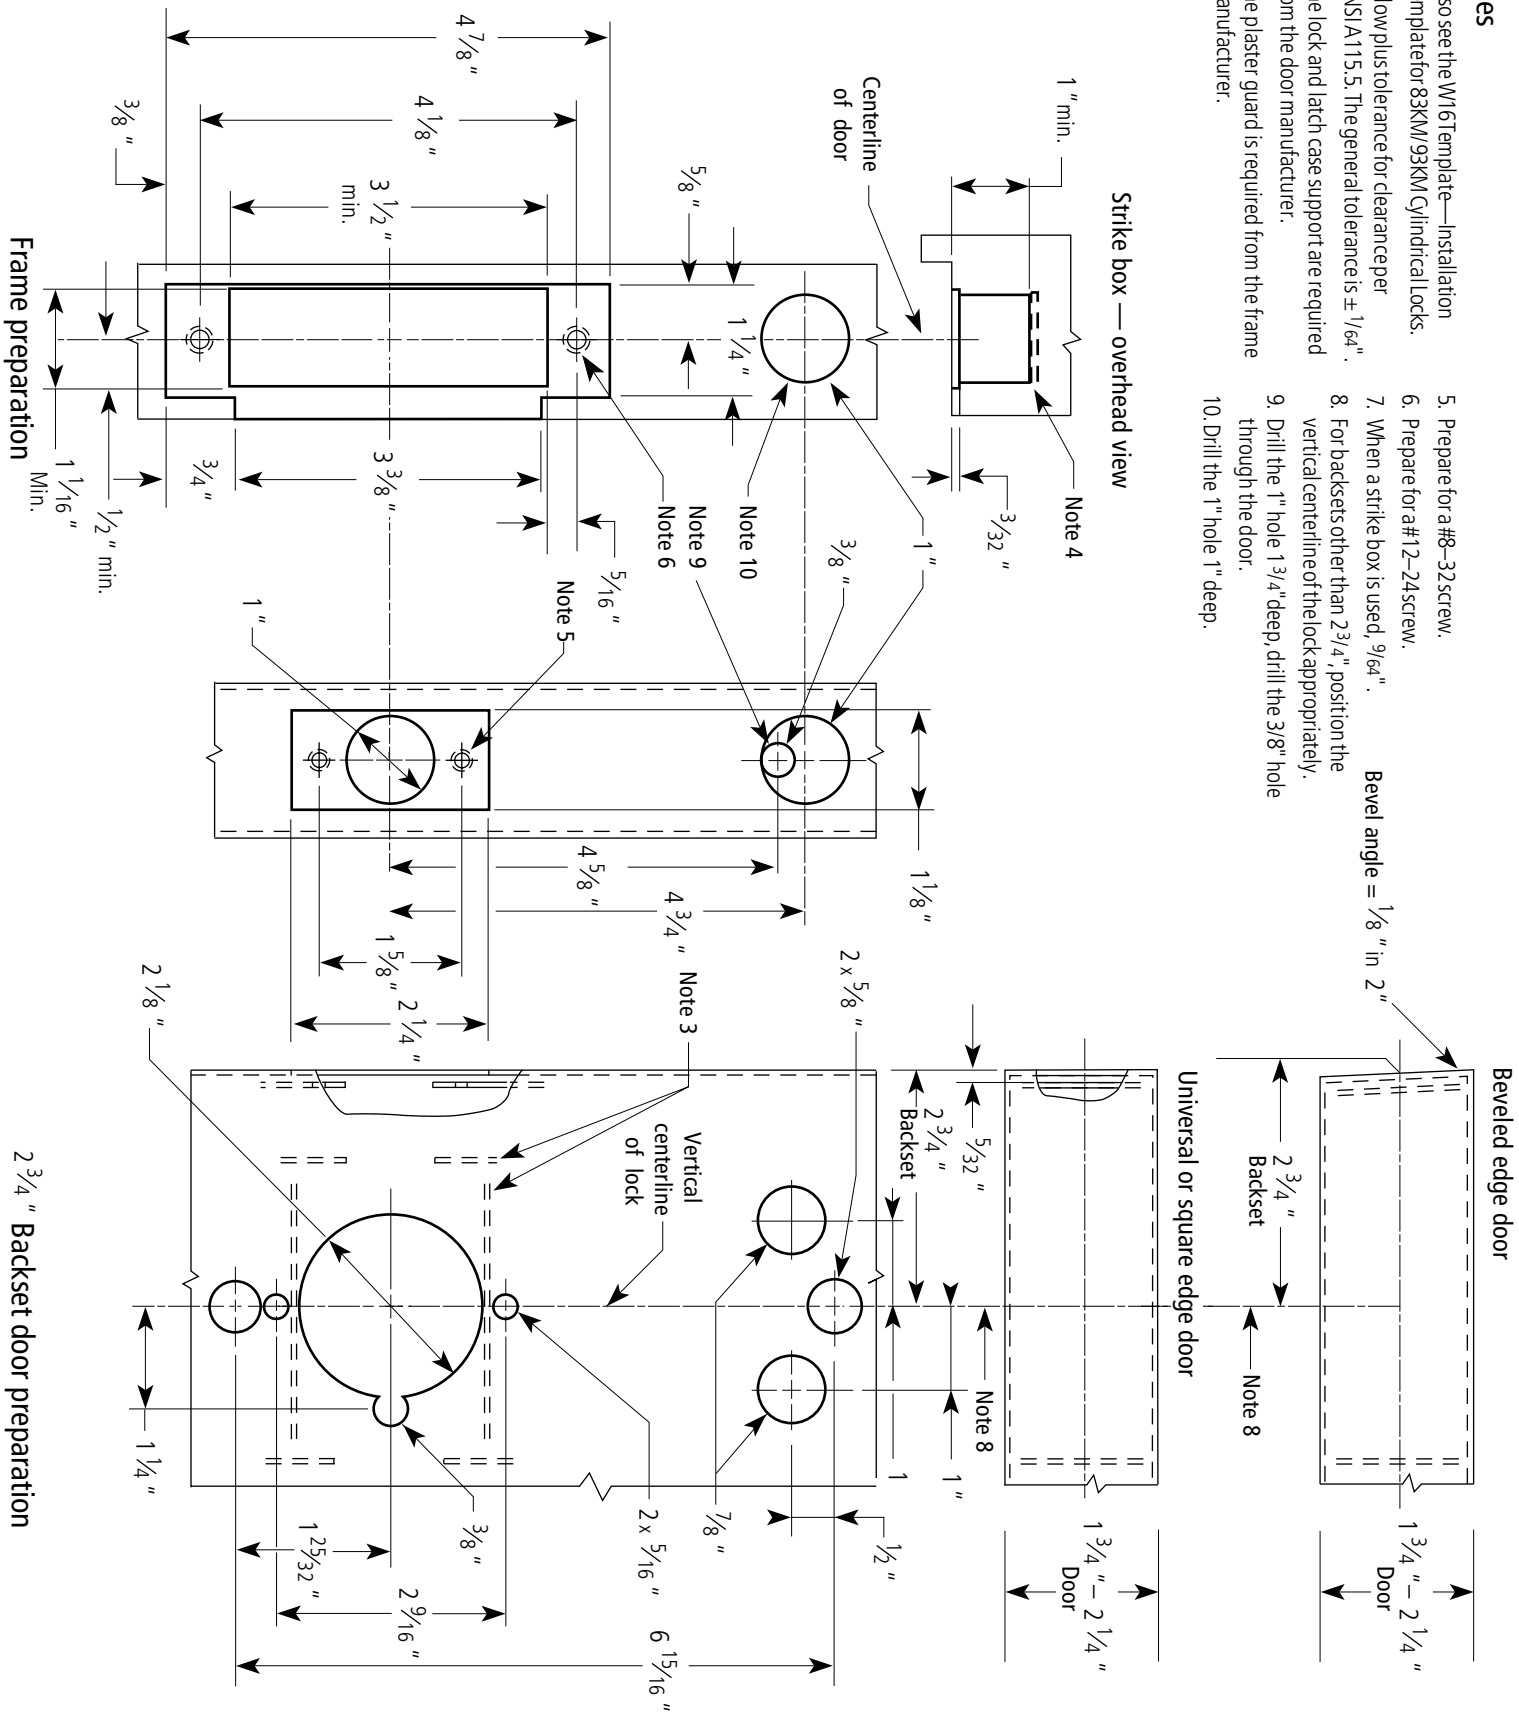

Title Installation Specifications for 83KM/93KM-85KM/95KM IDH Max Cylindrical Locks with Large Strike				BEST ACCESS SYSTEMS	
Series 8KM/9KM	Backset 2 3/4", 3 3/4", 5"	Trim style MS, PH, PM	Door thickness 1 3/4"-2 1/4"	Rev date 09/2014	Template number W14
					Rev C