


SHELTER™ Gateway and Repeater by BEST

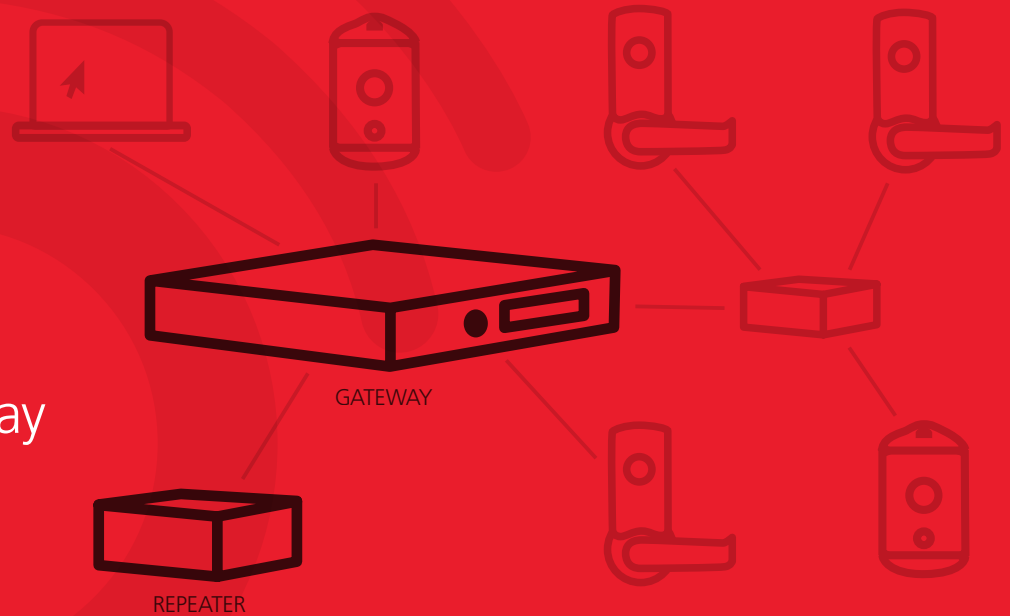


With the gateway and repeater as the foundation of SHELTER, you're able to configure the system that makes sense for your building and occupants.


At the core of the SHELTER system is a gateway that sends signals to each door lock to initiate lockdown. With a 400-foot range,* the gateway can be paired with up to eight repeaters to extend the signal range throughout a building. Most unique of all, with assistance from your integration resource, the SHELTER repeater can be configured to send a relay signal to your pre-installed access control or alarm system, allowing communication with first responders.

**400 feet inside; 1,200 feet line of sight (typical)*

BEST SHELTER™ helps you create safe spaces within your facility quickly and safely.

This wireless responsive lockdown solution can be fully configured to adapt to your building and security protocol. With SHELTER, you can be confident your building is ready to respond in any situation. Integrating with first response systems and electronic access control systems, SHELTER can be an essential part of any building security system.



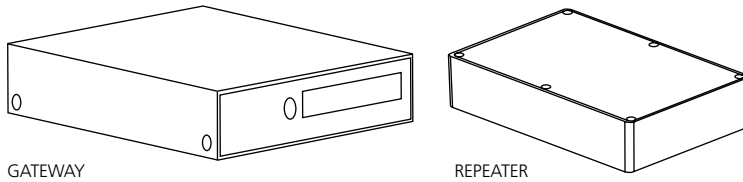

SHELTER Gateway Specifications

Wireless Communications	900 MHz; Range of 400 ft. indoors; 1,200 ft. line of site (typical)
Internet Connection	Ethernet connection standard; Wi-Fi or cellular connections optional Cloud connectivity; Functional without Internet connection
Gateway	Connected to cloud via Internet connection; Internet connection allows system status updates to cloud software; Once system is configured, lockdown will still be functional if Internet connection not present; Cloud software diagnostics and all clear will not function if Internet connection not present.
Environmental	Indoor
Code Compliance	UL 60950, FCC Part 15 Compliant
Power Supply	12VDC; Wall wart power supply provided; Battery backup recommended
System Setup	Local webpage for basic setup and configuration
Size	6.7" x 6.3" x 1.1"

SHELTER—a unique combination of code-compliant mechanical hardware and proven technologies—is a responsive lockdown solution ideal for all types of buildings/environments and budgets.

SHELTER Repeater Specifications

Wireless Communications	900MHz; Range of 400 ft. indoors; 1,200 ft. line of site (typical)
Functions	Repeater extends range of network; Maximum 8 repeaters actively extending network can be connected to gateway (repeater relays can be used); Additional repeaters can be in network, but used for relay only
Environment	IP 67 Enclosure
Code Compliance	UL 60950
Power Supply	12/24VDC power; Power supply not included; Battery backup recommended
Inputs	2 dry contact switch inputs; Configurable to initiate or cancel lockdown
Outputs	2 form C relay outputs, 24V/1A rated
Size	9.4" x 6.3" x 3.3"

All specifications and content is preliminary until final product release.