


Notes

- 1 Allow plus tolerance for clearance per ANSI A115.2.
- 2 Lock and latch case support by door manufacturer.
- 3 Prepare for a #8-32 screw.
- 4 For 82T deadbolts, a 1/8" latch face is available.
- 5 Plaster guard by door manufacturer.

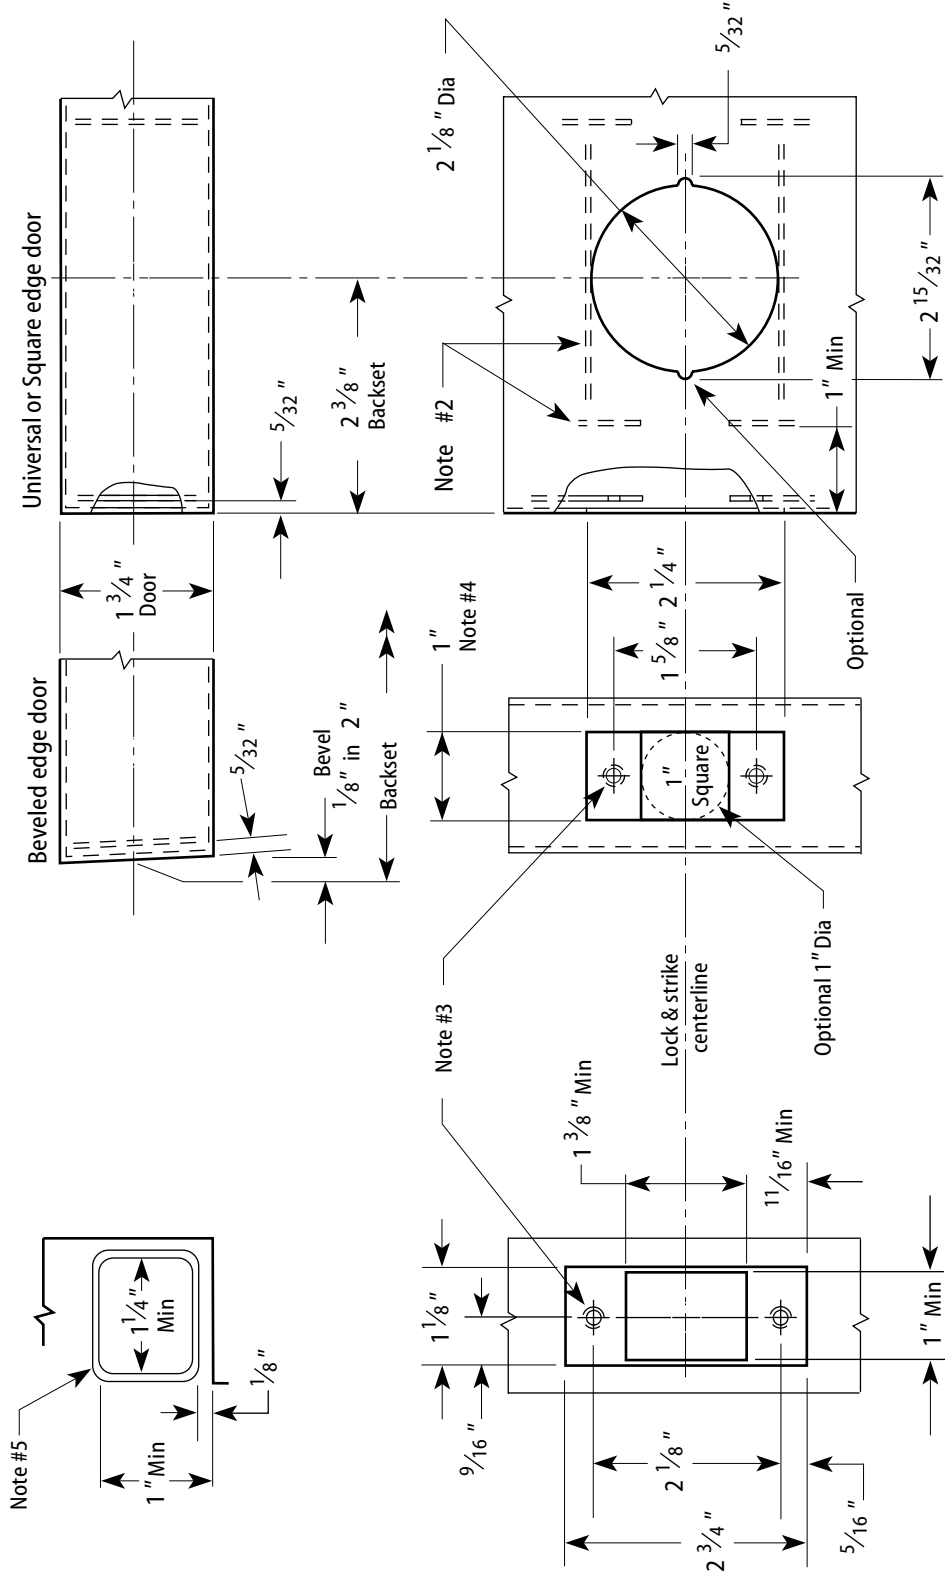

2 3/8" Backset Door Preparation

Frame Preparation

Title Installation Specifications for 72T & 82T Tubular Deadbolt Locks with Standard Strike				BEST ACCESS SYSTEMS		
Series 72T & 82T	Backset 2 3/8"	Trim style	Door thickness 72T: 1 3/8"-2 1/8" 82T: 1 3/8"-3"	Rev date 09/2000	Template number T01	Rev E