

**Door Closer Models: EHD9016 Spring Door Saver Arm Installation
With Thumb Turn Hold Open [S-DST] [Parallel Arm Mount] With Drop Plate DP90
Template/Drilling Instructions**




For online instructions, assistance or warranty information:
Call 1-800-392-5209 or visit <https://dhwsupport.dormakaba.com/hc/en-us>

LEFT HAND SHOWN IN RED

Material	Drill	Fastener
Steel	1/8" [3.1]	DPK
Steel/Aluminum	7/32" [5.5]	TPK
Wood/Steel Composite	3/8" [9.5]	Sex Nut
Steel/Aluminum (arm shoe)	#7 (.201) 13/64" [5.2]	1/4-20 unc Machine Screw
Steel/Aluminum (closer body)	#7 (.201) 13/64" [5.2]	1/4-20 unc Machine Screw

Soffit Plate Center Distance	Opening Angle
11-3/16" [284]	85°
10-7/16" [265]	90°
9-3/16" [233]	100°
8-1/8" [206]	110°

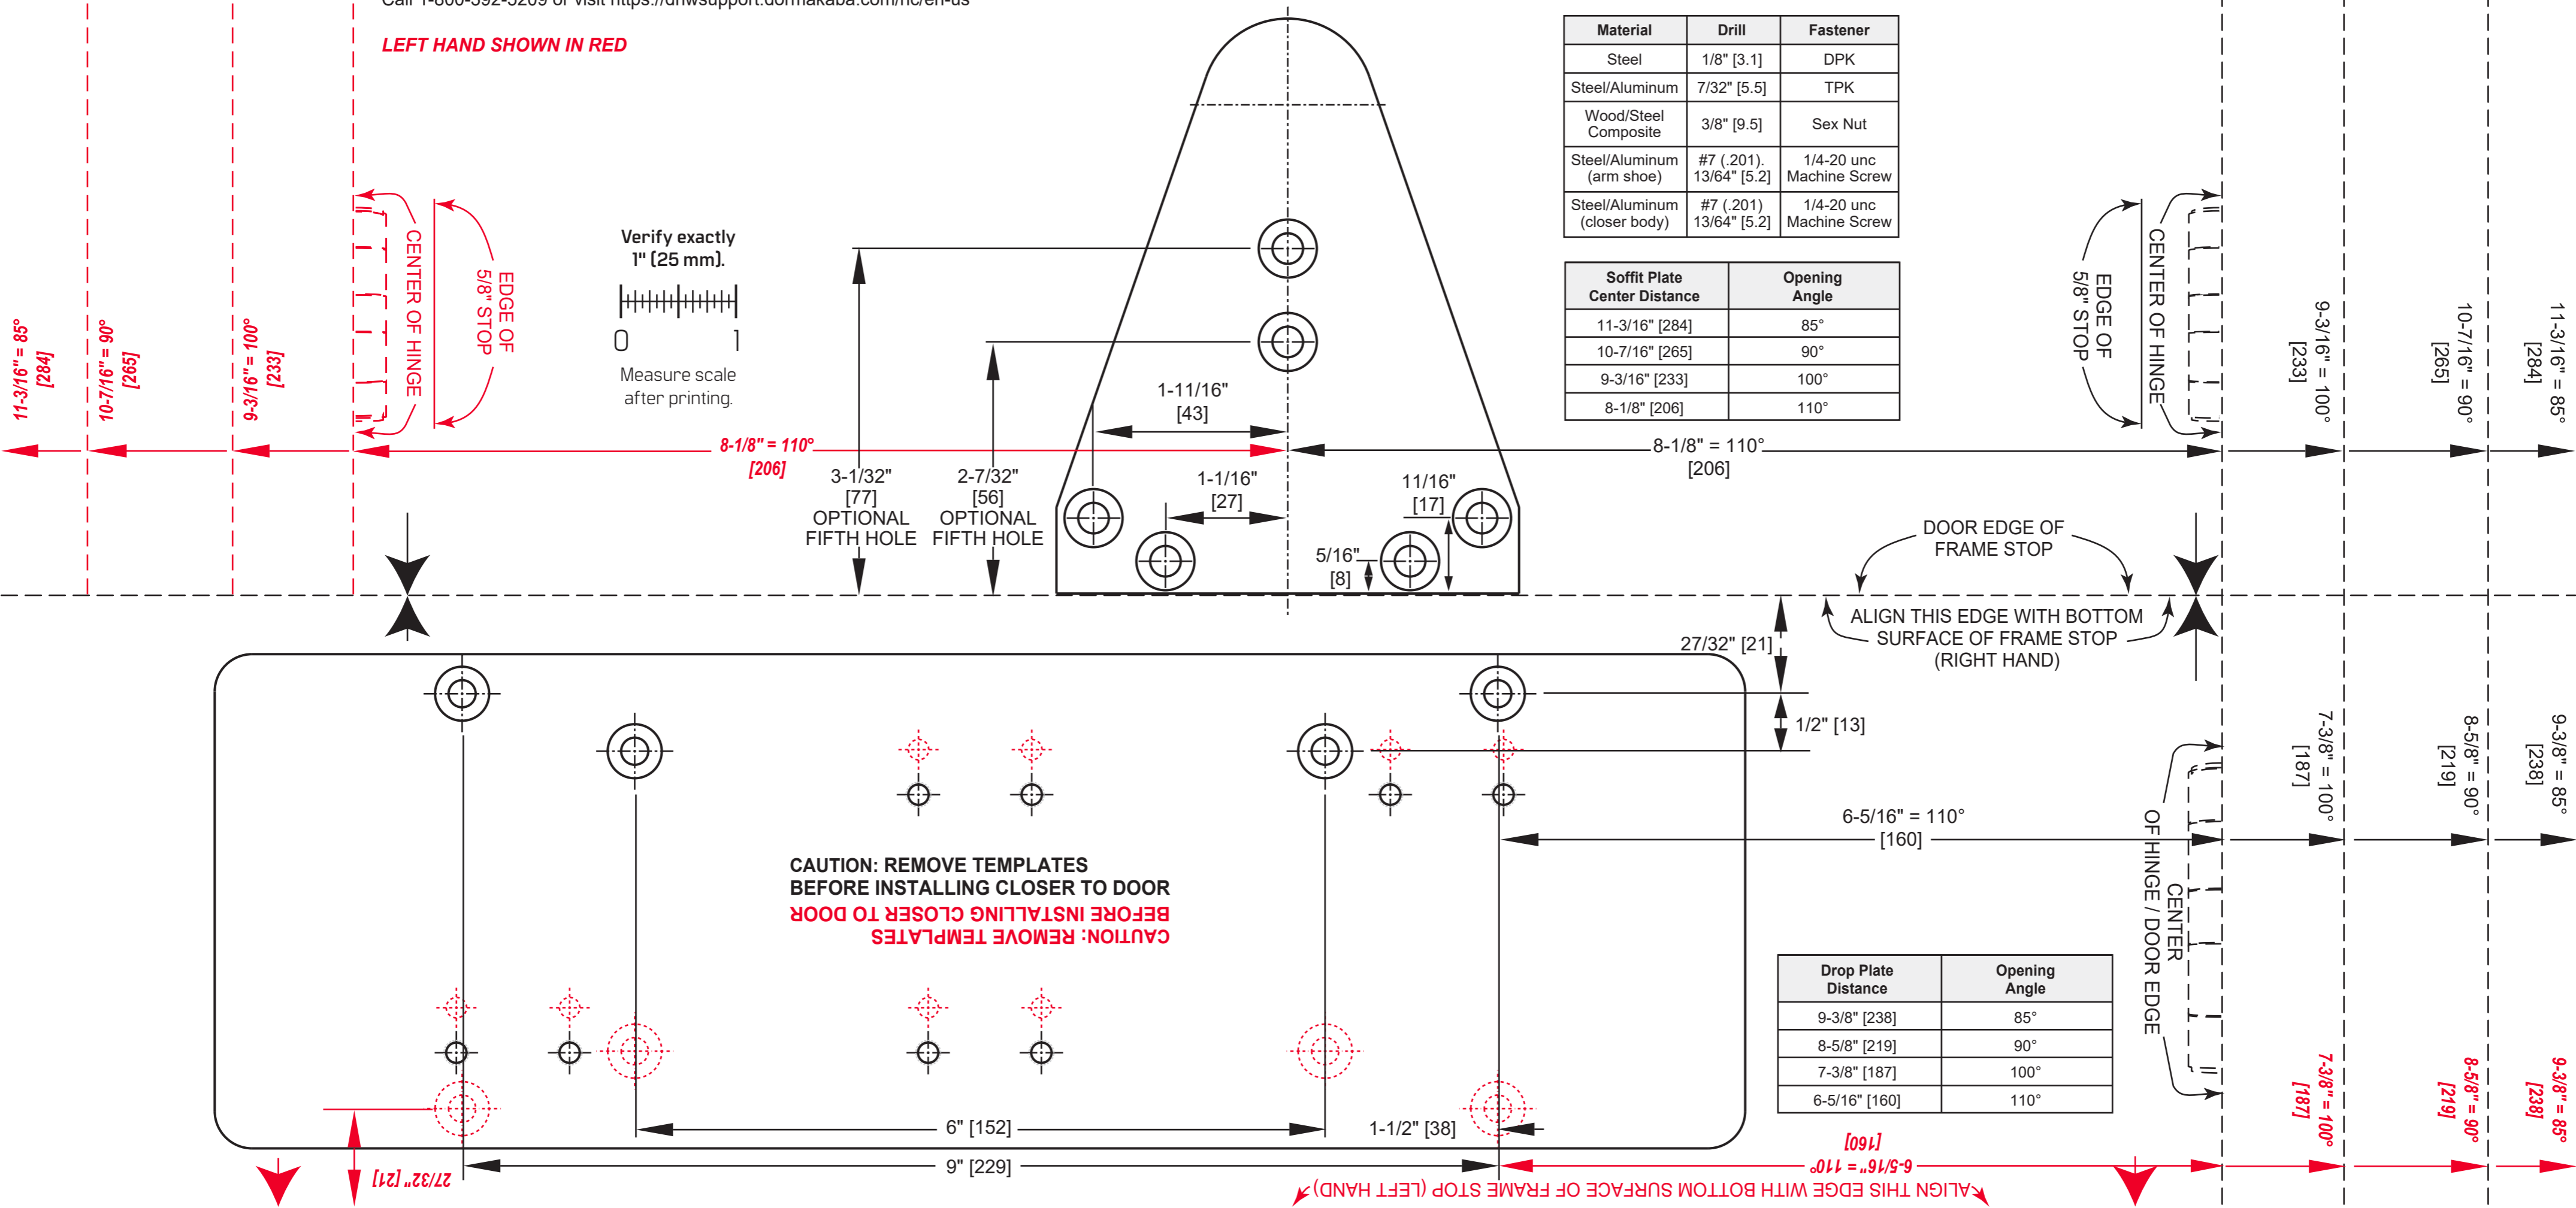

Verify exactly 1" (25 mm).
Measure scale after printing.

Drop Plate Distance	Opening Angle
9-3/8" [238]	85°
8-5/8" [219]	90°
7-3/8" [187]	100°
6-5/16" [160]	110°