

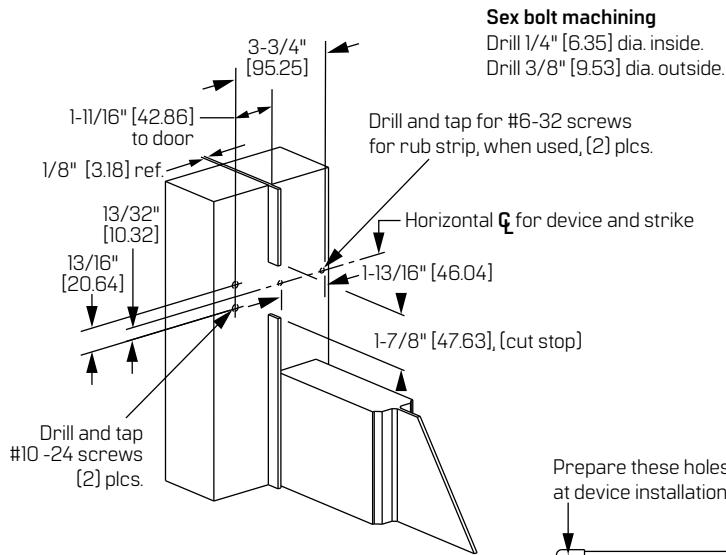
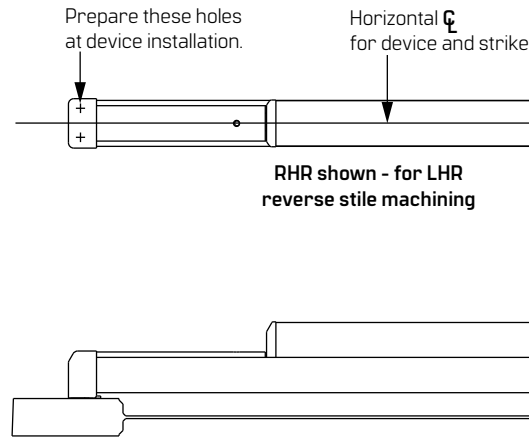


# Series: 2100 Rim Device – Trim Series: Exit Only, Cylinder Only, 1700, 4900 – Strike: S988 – Aluminum Door Preparation

For online instructions, assistance or warranty information:  
Call 1-800-392-5209 or visit <https://dhwsupport.dormakaba.com/hc/en-us>

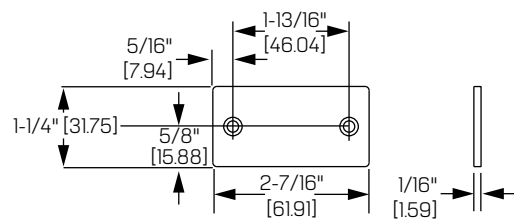

**NOTE: "LETTER" at end of trim model number designates lever or grip style. Except as noted, lever or grip style has no effect on stile machining.**

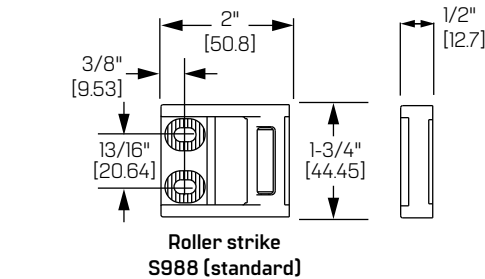

Aluminum door and frame with blade or applied stop		
Min. stiles	Device size	Door width
3-1/2" [88.9]	3' - 0" [0.91m]	2' - 6" to 2' - 11" [0.76 m] to [0.89 m]
	4' - 0" [1.22 m]	3' - 0" to 3' - 11" [0.91 m] to [1.19 m]
4-1/4" [107.95] or flush door	3' - 0" [0.91m]	2' - 7" to 3' - 0" [0.79 m] to [0.91 m]
	4' - 0" [1.22 m]	3' - 1" to 4' - 0" [0.94 m] to [1.22 m]

A-hole (4) plcs.	Devices	Trims	B-hole	C-hole
#10-24 tap inside only	2101	Exit only	No	No
	2103	Cylinder only	1-3/8" [34.93] dia. inside 1-3/16" [30.16] dia. outside	
1/4" [6.35] dia. inside 3/8" [9.53] dia. outside	2101	1701, 4901	No	1-3/4" [44.45] dia. through door
	2102	1702, 4902		
	2103	1703, 4903	1-3/8" [34.93] dia. through door	
	E2103	4908, V4908		
	2105	1705		
	2108	4908, V4908	No	
	2110			
	2114	4914		
2115	1715			

