

FULL MORTISE TEMPLATE PIVOT REINFORCED HINGES WITH 4" DOOR PLATE FOR DOORS WITH BEVELED EDGE HINGE STILES

Size: 5 x 41/2"

TOP HINGE - RIGHT HAND SHOWN LEFT HAND IS OPPOSITE

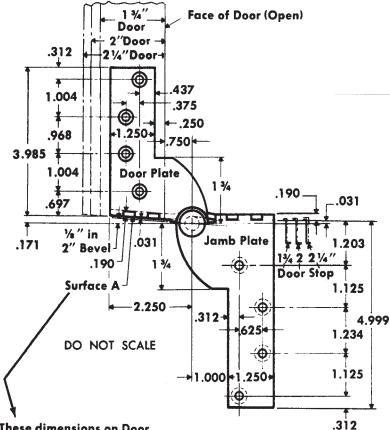

These dimensions on Door Leaf are to be measured along Surface "A"



For use with door holders, closers and operators which interfere with standard door plates shown on template T50-09.

SET CLASS NO.		
Steel	Nonferrous	Gauge of Metal
CB213 with 4 do or plate	CB223 with 4 do or plate	0.190
FBB213 with 4 do or plate	FBB223 with 4 door plate	0.190
CB1909 with 4 do or plate	CB1969 with 4 door plate	0.190
CB1909R with 4 do or plate	CB1969R with 4 do or plate	0.190

Machine Screw Size — $\frac{1}{2} \times 12-24$ F.H. Wood Screw Size — $\frac{1}{2} \times No. 12$ F.H.


NOTE: Backsets which apply when pivot-reinforced hinge is used on door thickness indicated and when the usual 1/16 stop clearance is desired.

Door	*Backset on	*Backset on
Thickness	Door	Frame
1 3/4	1/4	5/16
2	1/2	9/16
2 1/4	3/4	13/16

*CAUTION: These backsets must be used on ALL hinges in set.

CENTER AND BOTTOM HINGES

Size $-5^{"} \times 4^{1/2}$ " Gauge of Metal -.190

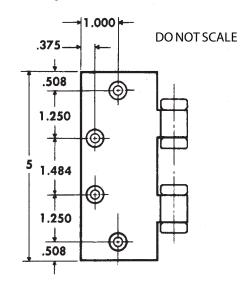

Machine Screw Size — $\frac{1}{2} \times 12-24$ F.H. Wood Screw Size — $\frac{1}{2} \times No. 12$ F.H.



dormakaba USA Inc. 6161 East 75th Street Indianapolis, IN 46250 USA Customer Service: 1-800-392-5209 T-50-11_B